

UNIVERSAL UNDERCOVER™

LED Inserts and Bezels

1.800.338.7337

LED INSERTS/BEZELS

www.soundoffsignal.com



10 - 16 Vdc LED Inserts

- 10' Cable Length #ELUC2S010(x)
- 25' Cable Length #ELUC2S025(x)

10-30 Vdc LED Inserts

- 10' Cable Length #ELUC2H010(x)

Includes extreme angle lense, in-line flasher and cable for hardwire installation



Bezels

- Black #PLUC2HSB
- Chrome #PLUC2HSC
- White #PLUC2HSW

Includes mounting gasket and hardware

Bezel with Insert

- Black #ELUC2SB10(x)
- Chrome #ELUC2SC10(x)
- White #ELUC2SW10(x)

Includes 10-16 Vdc insert with extreme angle lense and 10' cable, inline flasher with bezel, mounting gasket and hardware

Features


- LED 'hide away' insert elevates safety lighting with interchangeable lenses that tailor the light output to complement your mounting application
- 2 additional lenses available for customized light output
- Retrofits with existing 1" strobe tube cutouts in headlight, taillight or corner lights in all types of commercial vehicles
- Optional cruise mode reduces light output to 20% brightness
- Use with optional bezels to surface mount to any flat area on the vehicle body for additional lighting anywhere

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

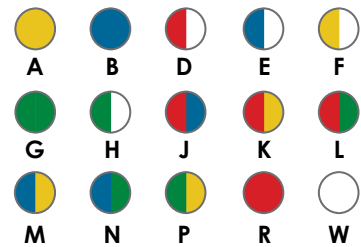

Accessories: Lens

- Extreme Angle #PLUC2LN1E
- Vertical/Forward Impact #PLUC2LN1V
- Horizontal/Side Impact #PLUC2LN1H

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	30 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	6 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	Less than 1 amp (flash pattern dependent) at 12.8 Vdc
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
DIMENSIONS	Insert: 1.5" (3.8 cm) Diameter x 0.9" (2.3 cm) H, Bezel: 2.2" (5.6 cm) L x 1.65" (4.2 cm) H x 0.63" (1.6 cm) D
WARRANTY	Five-year
MOUNTING	Headlight/Taillight Mount into 1" Diameter cutouts or Surface Mount with optional bezel. Bezel mounts on 1.89" (4.8 cm) centers