




Passion in high frequency

Coaxial Cables, Connectors, and Adapters

for Industry, Transportation, and Communication

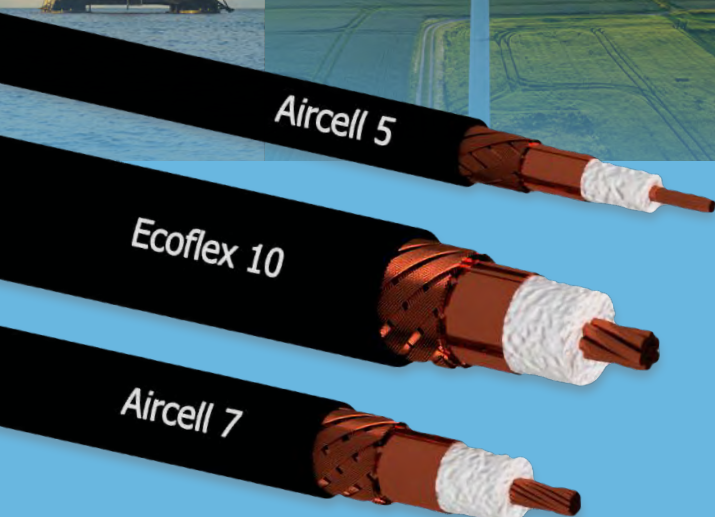

***You need the
best connection!***

SSB-Electronic GmbH

from Engineering Office to RF Specialist

SSB-Electronic was founded as an engineering office for telecommunications in 1976. Since then, we have been a reliable partner for the design, manufacturing, and distribution of devices, assemblies, and customized solutions in the field of radio frequency technology and communications engineering. Our international customer base includes industrial companies, research institutes, authorities, security services, and aid organizations.

Since our establishment, we have utilized our comprehensive expertise in the high-frequency domain to address market developments with innovative products. The trend towards higher frequencies and the customer demand for optimized attenuation and optimal cable adaptation led to the development of low loss coaxial cables and matching connectors in 1989. Our coaxial cable brands – Aircell®, Aircom®, and Ecoflex® – have since set standards and established themselves as the European standard in telecommunications.

Rising demands for fire protection and the increasing use of coaxial cables in challenging environmental conditions led to the development of Ecoflex Heatex® and SeaTex®

coaxial cables. Ecoflex cables with Heatex coating are halogen-free, flame-retardant, exhibit low flame spread, and are suitable for use in buildings, installations, and hazardous areas. Our SeaTex coaxial cables are tailored to the specific requirements of the maritime sector. These specialized cables meet the SHF2 standard and are suitable for applications in shipbuilding and saltwater-corrosive environments.

In our in-house high-frequency laboratory, our products and RF design concepts are constantly optimized and developed using measurement and analysis instruments up to 13 GHz. We place great importance on ensuring that our coaxial cables have almost no interference points throughout the frequency range, minimizing the potential for signal reflections. Our connectors are equipped with enhanced surfaces (e.g., white bronze) to increase their intermodulation resistance, as well as corrosion and oxidation resistance.

SSB-Electronic will continue to offer innovative products and continuously improved services that are always a step ahead of their time.



Facts & Figures

- 1976 Founding of SSB-Electronic by Bernd Bartkowiak and Rolf Albert as an engineering office for communications technology in Iserlohn
- 1989 Introduction of the first coaxial cable
- 2008 Introduction of halogen-free and flame-retardant coaxial cables under the brand Heatex® for environments with elevated fire protection requirements
- 2008 Change in management: Peter Schulte-Nölle becomes the new owner and managing director
- 2010 Relocation of the company from Iserlohn to Lipstadt
- 2016 Location change within the industrial area Am Mondschein in Lipstadt to the current location Am Pulverhäuschen
- 2017 Introduction of weather-resistant coaxial cables of the SeaTex® series for marine and offshore applications
- 2017 Implementation of the quality management system with successful certification according to ISO 9001:2015
- 2018 Acquisition of VF-Feintechnik GmbH – a company developing and manufacturing access control systems in Wiesentheid

Index

Information

Quality and Sustainability	4
B2B Partner	6
Our Product Range	8
Assembled Coaxial Cables	9
Fire Classes	10
Areas of Application	12

Aircell® & Aircom®

Aircell® 5	14
Aircell® 5 Heatex®	16
Aircell® 7	18
Aircell® 7 Heatex®	20
Aircom® Premium	22
Aircom® Premium FRNC	24
Aircom® 15	26

Ecoflex®

Ecoflex® 5	28
Ecoflex® 7	30
Ecoflex® 10	32
Ecoflex® 10 FRNC	34
Ecoflex® 10 Plus	36
Ecoflex® 10 Plus Heatex®	38
Ecoflex® 15	40
Ecoflex® 15 FRNC	42
Ecoflex® 15 Plus	44
Ecoflex® 15 Plus Heatex®	46

SeaTex®

SeaTex® 5	48
SeaTex® 7	50
SeaTex® 10	52
SeaTex® 15	54

H155 SSB

H155 SSB	56
H155 PE SSB	58

Connectors and Adapters

Coaxial Connectors N	60
Coaxial Connectors BNC	62
Coaxial Connectors TNC	62
Coaxial Connectors SMA	64
Coaxial Connectors UHF	64
Coaxial Connectors 7-13 DIN	64
Coaxial Connectors FME	66
Coaxial Connectors 4.3-10	66
Coaxial Connectors NEX 10	66
Coaxial Adapters	68

Handling Instructions	70
-----------------------------	----

Contact	71
---------------	----





Our Philosophy – Quality and Sustainability

Quality

High-quality and flawless products that meet customer requirements are fundamental to customer satisfaction for us. Our high standard of quality extends from thorough supplier evaluations and incoming goods inspections to production. Our products are manufactured according to the highest quality standards. In our high-frequency laboratory, they undergo extensive testing and scrutiny by our quality assurance team.

Our company is certified according to ISO 9001:2015. We continuously work to ensure and improve the quality of our processes and structures.

Social Responsibility

In addition to product quality, we place great emphasis on responsible and sustainable actions, including towards our workforce. We promote fair and respectful collaboration. Appreciation and transparency characterize communication within our company.

We provide our employees with opportunities for professional development. As an IHK-certified company, we regularly train and support our apprentices as they enter the workforce.

Family-friendliness is an integral part of our daily operations. Through specific offers and measures, we ensure family-friendly working conditions, actively contributing to the compatibility of family and work.

By collaborating with local schools, universities, and suppliers, we strengthen our local community.



Sustainability

For us, responsible and sustainable action also means producing our products with consideration for the environment. Compliance with all laws, regulations, and provisions is a matter of course for us.

Increasing the longevity of our products, avoiding hazardous substances such as lead, asbestos, or fluorinated hydrocarbons, and reducing environmental impact are integral parts of our corporate philosophy. We consistently align our daily actions with these goals.

Our products comply with European environmental directives:

- [Directive 2011/65/EU RoHS](#)
(Restriction of Hazardous Substances)
for the use of certain hazardous substances in electrical and electronic devices
- [Directive 2012/19/EU WEEE](#)
(Waste Electrical and Electronic Equipment)
for the disposal of electrical and electronic components and devices
- [Regulation 1907/2006/EG REACH](#)
(Registration, Evaluation, Authorisation and Restriction of Chemicals)
for the registration, evaluation, authorization, and restriction of chemicals



SSB – Your B2B Partner

Custom Solutions for Trade, Commerce & Industry

SSB-Electronic is your expert for innovative and powerful connectivity solutions across various industries. With our extensive experience in cables, connectors, and amplifier technology, we provide reliable solutions for demanding applications.

Our customers in industry, trade, and the public sector benefit from our comprehensive portfolio of cables, specifically optimized for the requirements of various applications.

Our customers worldwide come from industries such as:

- Building Construction / Fire Protection
- Railway Construction
- Shipbuilding / Maritime / Offshore
- Bus Construction
- Mobile Communications / 5G
- Wind Turbine Construction / Energy
- Audio / Video Technology
- IT / Computer Technology

Our cables not only meet the highest standards of quality and functionality but also ensure halogen-free and flame-retardant properties. This is crucial in buildings, rail, and road vehicles or ships to ensure passenger and staff safety. Our portfolio also includes cables designed for extreme conditions on land and at sea, exhibiting high resistance to heat, cold, oils, saltwater, UV radiation, and weather influences.

Our cable solutions comply with national and international standards, such as EN 50575, EN 45545-2, UN/ECE-R 118, etc., and possess all relevant approvals and certifications for the mentioned applications.

Further reasons for collaborating with us:

- We provide personalized advice and develop tailored solutions for your project.
- We conduct all necessary tests and measurements to ensure the quality of our cables.
- We ensure fast delivery of your goods.
- Upon request, we customize your cables and lines according to your specifications and deliver them ready for installation.





Our Product Range



Coaxial Cables & Coaxial Connectors

- Low Loss Coaxial Cables
- Coaxial Connectors of all standards
- Coaxial Adapters



SDR Technology

- Receivers (Perseus, Winradio)
- Transceivers



Radio Electronics

- Preamplifiers, Amplifiers
- Remote Power Splitters, Sequencers
- Antenna Switches



High-Frequency Design

- HF Circuit Design and Simulation
- Digital Circuit Design
- HF Component Design (Power Amplifiers, etc.)



Accessories

- Coaxial Relays, Attenuators, Terminal Loads
- Mounting Clamps, Grounding Kits, Lightning Protection
- Tools (Crimping Pliers, Cable Cutters)

Assembled Coaxial Cables

Tailored to Your Specifications

Share your application or installation requirements with us. As professional cable assemblers, we swiftly and impeccably manufacture your desired cable, accommodating even special requests with ease. Unlike many other companies in the industry, all our cable assemblies undergo precise high-frequency testing.

We deliver on promises that others merely make!

Take advantage of our cable configurator at www.ssb-electronic.com and order your desired coaxial cable with just a few clicks.

Choose from our low attenuation coaxial cable types, coaxial connectors of all common standards, and optional strain relief.



Your Benefits

- High-quality coaxial cables
- Precision craftsmanship in assembly
- Accurate HF measurements before and after assembly
- Assembly exclusively in Germany
- Detailed test certificate
- Cable testing at the selected frequency in the range of 100 KHz – 20.000 MHz, including a test report
- Swift delivery after ordering
- Special solutions such as phase-matched coaxial cables for antenna arrays



With us, you receive premium coaxial cables

*We guarantee the highest quality for your cable assemblies.
Speak with us – we look forward to your inquiry!*



+49 (0) 2941 - 93385 - 0

Fire Classes of Coaxial Cables

According to the EU Construction Products Regulation



The Construction Products Regulation No. 305/2011 (CPR) establishes uniform rules for the use of construction products within buildings and is implemented in all EU member states through the standard EN 50575. Cables, as construction products, are assigned to specific performance classes based on their fire behavior. Flame retardancy, smoke development, and halogen-free properties play a crucial role. Each fire class entails specific requirements for quality control.

The CPR thus establishes a unified system for the classification, evaluation, and certification of construction products for all EU countries. The aim is to enhance fire

safety in buildings. The use of certified cables is intended to provide more time for evacuation and facilitate the rescue of individuals in case of a fire.

Since July 1, 2017, our coaxial cables have been classified according to the CPR. They are appropriately labeled with a CE marking, and the Declarations of Performance (DoP) can be found on our website: www.ssb-electronic.com.

The following overview illustrates the classification of our coaxial cables into fire classes and their suitable areas of application.

Coaxial Cable	Euroclass according to EN 50575	Safety Requirement in Buildings	Application Area	Classification Criteria	AVCP System (Assessment and Verification of Constancy of Performance)
Aircell 5 Aircell 7 Ecoflex 10 Ecoflex 10 PLUS Ecoflex 15 Ecoflex 15 PLUS Aircom Premium	Eca	low	Cables for Standard Applications Buildings with low height, low user density, in apartments.	Flame spread EN 60332-1-2 H ≤ 425 mm	System 3 Initial type-testing by third-party notified testing laboratory Factory production control (FCB) by the manufacturer
Ecoflex 10 PLUS Heatex Ecoflex 10 FRNC	Cca s1 d0 a1	high	Cables for higher fire safety requirements In high-rise buildings, structural facilities, offices, retail premises, restaurants, hotels, underground garages, schools, dormitories, correctional facilities, leisure/amusement parks, etc.	Flame spread EN 60332-1-2 H ≤ 425 mm Heat release, vertical flame spread EN 50399 FS ≤ 2.0 m THR ≤ 30 MJ max. HRR ≤ 60 kW FIGRA ≤ 300 W/s Ignition source = 20.5 kW	System 1+ Initial type-testing by third-party notified product certification body Regular factory audits by notified certification body Continuous audit testing of samples by third-party notified product certification body Factory production control (FCB) by the manufacturer
Ecoflex 15 PLUS Heatex Ecoflex 15 FRNC	Cca s2 d2 a1			Smoke emission EN 50399/EN 61034-2 s1, s1a, s1b, s2, s3	
Aircell 5 Heatex Aircell 7 Heatex	Cca s1 d0 a1			Acidity/Corrosiveness EN 60754-2 a1, a2, a3 Burning Droplets EN 50399 d0, d1, d2	

Explanation:

Smoke emission

- s1: Low smoke emission, slow spread
TSP ≤ 50 m³, max. SPR ≤ 0.25 m²/s
- s1a: Transmittance ≥ 80 %
- s1b: Transmittance ≥ 60 % < 80 %
- s2: Moderate smoke emission and spread
TSP ≤ 400 m³, max. SPR ≤ 1.5 m²/s
- s3: Not specified

Dripping of burning material

- d0: No burning droplets or particles
- d1: No burning droplets or particles longer than 10 seconds
- d2: Not specified

Acidity of combustion gases

- a1: Slightly corrosive smoke gases, conductivity < 2.5 μS/mm and pH > 4.3
- a2: Average corrosive smoke gases, conductivity < 10 μS/mm and pH > 4.3
- a3: Not specified

Abbreviations:

- H: Vertical Flame Spread (mm)
- FS: Vertical Flame Spread (m)
- THR: Total Heat Release
- HRR: Max. Heat Release Rate
- FIGRA: Fire Growth Rate Index
- TSP: Total Smoke Production
- SPR: Max. Smoke Production Rate (m²/s)

Areas of Application

for SSB Coaxial Cables



IT & Computer Technology

Highly flexible and low attenuation coaxial cables

Aircell 5	14	Ecoflex 5	28	Ecoflex 15 FRNC	42
Aircell 5 Heatex	16	Ecoflex 7	30	Ecoflex 15 Plus	44
Aircell 7	18	Ecoflex 10	32	Ecoflex 15 Plus Heatex ...	46
Aricell 7 Heatex	20	Ecoflex 10 FRNC	34	H155 SSB	56
Aircom Premium	22	Ecoflex 10 Plus	36	H155 PE SSB	58
Aircom Premium FRNC	24	Ecoflex 10 Plus Heatex ...	38		
Aircom 15	26	Ecoflex 15	40		



Audio & Video

Highly flexible and low attenuation coaxial cables

Aircell 7	18
Ecoflex 7	30



Fire Protection

Flame-retardant coaxial cables with Euroclass Cca according to EN 50575

Aircell 5 Heatex	16	Ecoflex 10 Plus Heatex ...	38
Aricell 7 Heatex	20	Ecoflex 15 FRNC	42
Ecoflex 10 FRNC	34	Ecoflex 15 Plus Heatex ...	46



Building Construction

Coaxial cables with Euroclasses Fca, Dca, and Cca according to EN 50575

Aircell 5	14	Aircom 15	26	Ecoflex 10 Plus Heatex ...	38
Aircell 5 Heatex	16	Ecoflex 5	28	Ecoflex 15	40
Aircell 7	18	Ecoflex 7	30	Ecoflex 15 FRNC	42
Aricell 7 Heatex	20	Ecoflex 10	32	Ecoflex 15 Plus	44
Aircom Premium	22	Ecoflex 10 FRNC	34	Ecoflex 15 Plus Heatex ...	46
Aircom Premium FRNC	24	Ecoflex 10 Plus	36		



Mobile Communications

Intermodulation-resistant coaxial cables

Aircom Premium	22	Ecoflex 10 Plus.....	36	Ecoflex 15 Plus Heatex ...	46
Aricom Premium FRNC	24	Ecoflex 10 Plus Heatex ...	38	H155 SSB	56
Aircom 15	26	Ecoflex 15.....	40	H155 PE SSB.....	58
Ecoflex 10	32	Ecoflex 15 FRNC.....	42		
Ecoflex 10 FRNC	34	Ecoflex 15 Plus.....	44		



Bus Construction

Flame-retardant coaxial cables with UN/ECE-R 118 approval

Aircell 5	14
Aircell 7.....	18
Ecoflex 10	32



Railway Construction

Flame-retardant coaxial cables certified according to EN 45545-2

Aircell 5 Heatex	16
Aricell 7 Heatex	20
Ecoflex 10 Plus Heatex ...	38
Ecoflex 15 Plus Heatex ...	46



Shipbuilding

Coaxial cables with DNV certification for harsh environmental conditions

Seatex 5	48
Seatex 7	50
Seatex 10	52
Seatex 15	54



Wind Turbine Construction

Coaxial cables with DNV certification for harsh environmental conditions

Seatex 5	48
Seatex 7	50
Seatex 10	52
Seatex 15	54

Aircell[®] 5

thin, low-loss, and stray radiation resistant



Aircell 5 is a flexible and thin coaxial cable with a 5 mm outer diameter designed for the frequency range from DC to 10 GHz. Its low-loss characteristics in relation to its diameter and compatibility with standard RG 58 connectors make it the preferred choice not only for Wireless LAN applications but also for general RF communications.

The low attenuation of Aircell 5 is achieved through advanced manufacturing techniques and a low-loss PE-LLC dielectric with a foaming rate of more than 70%. This unique dielectric not only ensures low attenuation but also provides water resistance and long-term stability. Aircell 5 features a solid inner conductor extruded from low-oxygen copper (OFC). Additional advantages of this cable include double shielding, consisting of overlapping 100% tight copper foil and an additional shield braiding of bare copper wires with 70% coverage. The copper foil is coated with PE to prevent cracking due to short radius bends. The black PVC jacket of Aircell 5 is UV-stabilized.

As Aircell 5 shares the same dimensions as RG 58 type cables (5 mm outer diameter), it is compatible with almost all standard coaxial connectors designed for 5 mm coaxial cables. Aircell 5 is the ideal choice when a thin, low-loss, and microwave-rated cable is required, suitable for numerous RF applications.

Key features

Diameter	5.0 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	29.54 dB
f max	10 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Insulation material according to DIN EN 50290-2-23 (VDE 0819), Tab. 2/A (HD 624.3)
- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- Flame-retardant according to UN/ECE-R 118:2019-06 § 6.2.6, ISO 6722-1:2011-10 § 5.22
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	bare copper wire
Inner conductor Ø	1 × 1.13 mm
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	3.1 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	70 %
Outer conductor Ø	3.7 mm
Jacket	PVC black, UV-stabilized
Weight	35 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	100 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 20.5 Ω/km
DC-resistance outer conductor	22 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	4 kV
Max. voltage	2.5 kV

Aircell 5 RG 58/U RG 213/U

Capacitance	78 pF/m	102 pF/m	101 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	2.78	5.00	2.00
100 MHz	8.93	17.00	7.00
500 MHz	20.49	39.00	17.00
1000 MHz	29.54	54.60	22.50
3000 MHz	53.57	118.00	58.50


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.97	1000 MHz	29.54
10 MHz	2.78	1296 MHz	33.92
50 MHz	6.28	1500 MHz	36.70
100 MHz	8.93	1800 MHz	40.50
144 MHz	10.76	2000 MHz	42.88
200 MHz	12.74	2400 MHz	47.38
300 MHz	15.70	3000 MHz	53.57
432 MHz	18.99	4000 MHz	62.88
500 MHz	20.49	5000 MHz	71.30
800 MHz	26.24	6000 MHz	78.85
		10000 MHz	106.40


Max. Power Handling (W at 40 °C)

10 MHz	1.885	3000 MHz	98
100 MHz	587	4000 MHz	83
500 MHz	256	5000 MHz	74
1000 MHz	178	6000 MHz	66
2000 MHz	122	10000 MHz	49

Typ. Attenuation (dB/100 m at 20 °C)

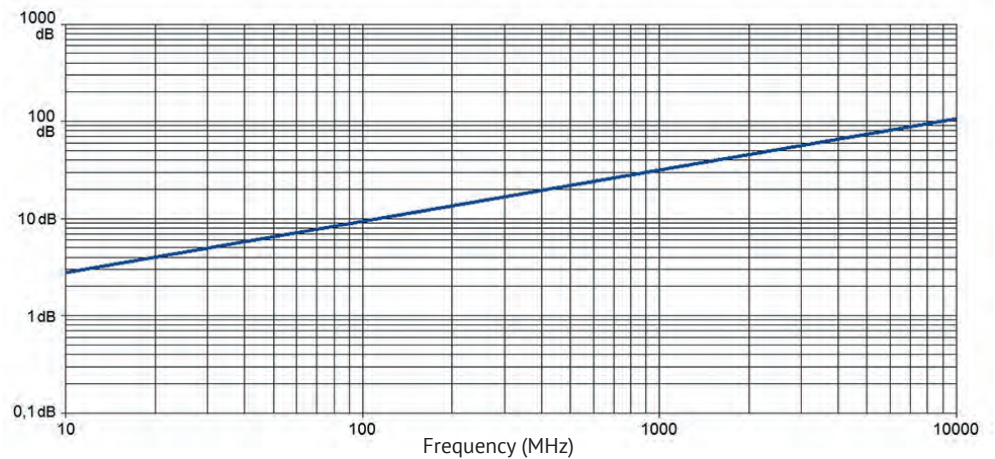

Typ. Return Loss

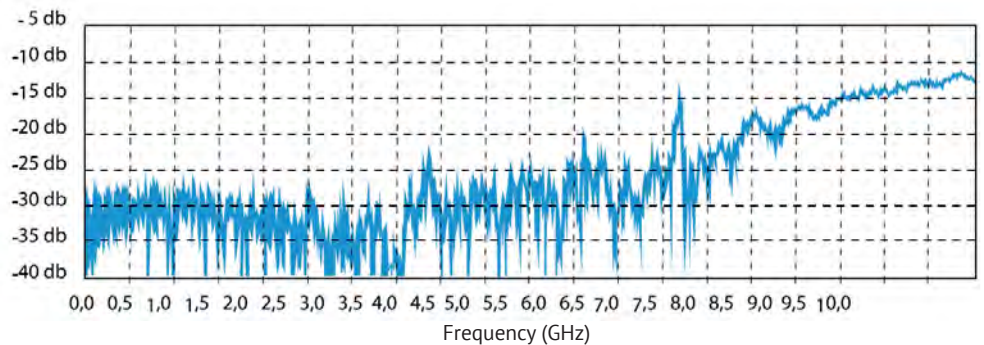

Aircell® 5 Heatex®

low-loss, halogen-free, flame-retardant,
suitable for installation in buildings
and for railway applications



Aircell 5 Heatex is a flexible and thin coaxial cable with a 5 mm outer diameter designed for the frequency range from DC to 10 GHz. Its low-loss characteristics and compatibility with standard RG 58 connectors make it the top choice not only for Wireless LAN applications but also for general RF communications.

The low attenuation of Aircell 5 Heatex is achieved through advanced manufacturing techniques and a low-loss PE-LLC dielectric with a foaming rate of more than 70%. This unique dielectric not only ensures low attenuation but also provides water resistance and long-term stability. Aircell 5 Heatex features a solid inner conductor extruded from low-oxygen copper. Additional advantages of this cable include double shielding, consisting of overlapping 100% tight copper foil and an additional shield braiding of bare copper wires with 70% coverage. The copper foil is coated with PE to prevent foil cracking due to short-radius bends.

The jacket of the cable is made of a halogen-free and flame-retardant copolymer. Thanks to this Heatex jacket, the cable has a low fire load, low flame propagation, limited smoke emission, and reduced production of toxic and corrosive gases. With the fire protection rating Cca, Aircell 5 Heatex is approved for installation in public buildings.

Aircell 5 Heatex is certified for railway applications for both interior and exterior use, meeting the requirements of sets R15 and R16 of the EN45545-2 standard.

Key features

Diameter	5.0 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	29.54 dB
f max	10 GHz
Euroclass according to EN 50575	Cca

Characteristics

- Certified according to EN 45545-2:2013+A1:2015 and EN 45545-2:2020 Requirement Sets R15 + R16 for railway applications
- Flame resistance tested according to EN 60332-1-2:2004 + A1:2015 + A11:2016 and EN 60332-1-3:2004 + A1:2015
- Smoke density tested according to DIN EN 61034-2:2005
- Smoke gas toxicity tested according to EN 50305:2002 Sec. 9.2
- Vertical flame spread tested according to EN 50305:2002 Sec. 9.1.2 (Bundle test for cables $\varnothing \leq 6$ mm)
- Halogen-free tested according to DIN EN 50306-1:2003
- Halogen acid gas content tested according to DIN EN 60754-1:2015 (HCl < 0.5 %)
- Acidity of the combustion gases tested according to DIN EN 60754-2:2015 (pH value > 4.3)
- Conductivity of the combustion gases tested according to DIN EN 60754-2:2015 (< 10.0 $\mu\text{S}/\text{mm}$)
- Fluorine content tested according to EN 60684-2:2011 Sec. 45.2 Procedure A (< 0.1 %)
- Insulation material according to DIN EN 50290-2-23 (VDE 0819), Tab. 2/A (HD 624.3)
- Jacket material according to DIN EN 50290-2-27 (HD 624.7)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- UV-resistant

Technical Data

Inner conductor	bare copper wire
Inner conductor Ø	1 × 1.13 mm
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	3.1 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	70 %
Outer conductor Ø	3.7 mm
Jacket	thermoplastic copolymer (FRNC) black
Weight	37 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	100 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 20.5 Ω/km
DC-resistance outer conductor	22 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	4 kV
Max. voltage	2.5 kV

Aircell 5 Heatex RG 58/U RG 213/U

Capacitance	78 pF/m	102 pF/m	101 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	2.78	5.00	2.00
100 MHz	8.93	17.00	7.00
500 MHz	20.49	39.00	17.00
1000 MHz	29.54	54.60	22.50
3000 MHz	53.57	118.00	58.50


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.97	1000 MHz	29.54
10 MHz	2.78	1296 MHz	33.92
50 MHz	6.28	1500 MHz	36.70
100 MHz	8.93	1800 MHz	40.50
144 MHz	10.76	2000 MHz	42.88
200 MHz	12.74	2400 MHz	47.38
300 MHz	15.70	3000 MHz	53.57
432 MHz	18.99	4000 MHz	62.88
500 MHz	20.49	5000 MHz	71.30
800 MHz	26.24	6000 MHz	78.85
		10000 MHz	106.40


Max. Power Handling (W at 40 °C)

10 MHz	1.885	3000 MHz	98
100 MHz	587	4000 MHz	83
500 MHz	256	5000 MHz	74
1000 MHz	178	6000 MHz	66
2000 MHz	122	10000 MHz	49

Typ. Attenuation (dB/100 m at 20 °C)

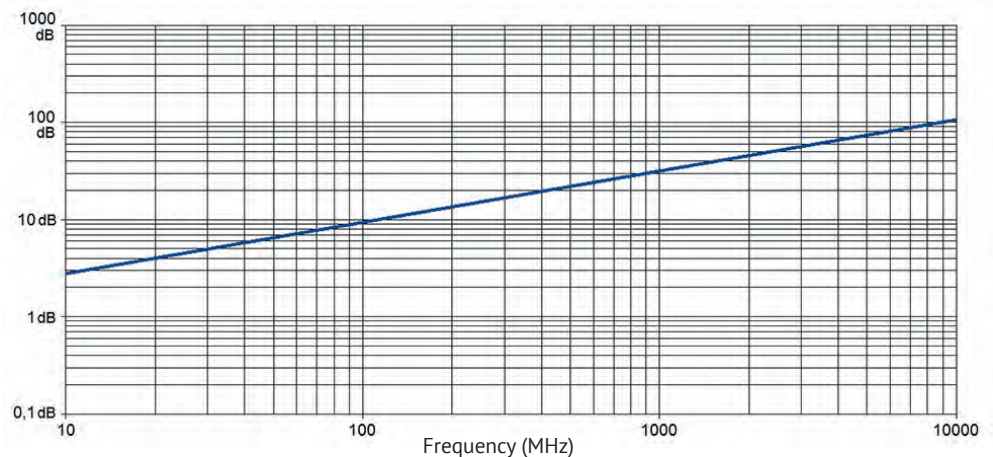

Typ. Return Loss

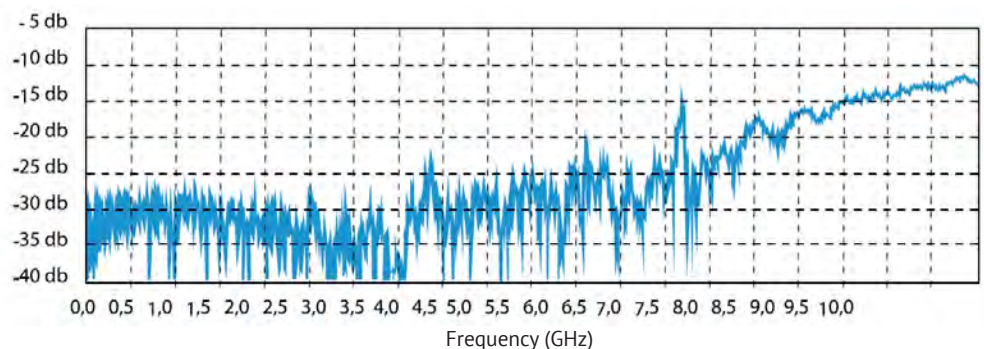

Aircell[®] 7

highly flexible, low-loss,
and stray radiation resistant



Aircell 7 is an ultraflexible coaxial cable designed for frequencies up to 6 GHz. Due to its low loss in relation to the outer diameter and the small bending radius, the cable can be used for numerous RF applications.

The low attenuation of Aircell 7 is achieved by using advanced manufacturing techniques and low-loss PE-LLC dielectric with a foaming rate of more than 70%. This unique dielectric also offers water resistance and long-term stability. The inner conductor, containing 19 stranded bare copper wires of low oxygen copper (OFC), provides the cable its remarkable flexibility. Further advantages of this cable include the use of double shielding, which is constructed of overlapping 100% tight copper foil and an additional shield braiding of bare copper wires with 85% coverage. The copper foil has an applied PE coating that prevents foil cracking due to short-radius bends. The black PVC jacket of Aircell 7 is UV-stabilized.

Aircell 7 is the right choice when a super flexible, low loss, and microwave-rated cable is required. It can be used for numerous RF applications.

Key features

Diameter	7,3 ± 0,2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	20,44 dB
f max	6 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Conductor/screen material according to DIN EN 13602 Cu-ETP-A
- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- Flame-retardant according to UN/ECE-R 118:2019-06 § 6.2.6, ISO 6722-1:2011-10 § 5.22
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	Stranded copper (Cu) wire
Inner conductor Ø	1.9 mm (19 × 0.38 mm, 14 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	5.0 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	85 %
Outer conductor Ø	5.7 mm
Jacket	PVC black, UV-stabilized
Weight	70 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 9.0 Ω/km
DC-resistance outer conductor	8.7 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	10 kV
Max. voltage	8 kV

Aircell 7 RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	2.09	2.00	5.00
100 MHz	5.97	7.00	17.00
500 MHz	13.98	17.00	39.00
1000 MHz	20.44	22.50	54.60
3000 MHz	38.84	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.52	1000 MHz	20.44
10 MHz	2.09	1296 MHz	23.60
50 MHz	4.29	1500 MHz	25.73
100 MHz	5.97	1800 MHz	28.50
144 MHz	7.22	2000 MHz	30.29
200 MHz	8.59	2400 MHz	33.82
300 MHz	10.64	3000 MHz	38.84
432 MHz	12.92	4000 MHz	46.66
500 MHz	13.98	5000 MHz	54.19
800 MHz	18.05	6000 MHz	61.66


Max. Power Handling (W at 40 °C)

10 MHz	2.040	2400 MHz	118
100 MHz	620	3000 MHz	104
500 MHz	260	4000 MHz	89
1000 MHz	191	5000 MHz	78
2000 MHz	131	6000 MHz	70

Typ. Attenuation (dB/100 m at 20 °C)

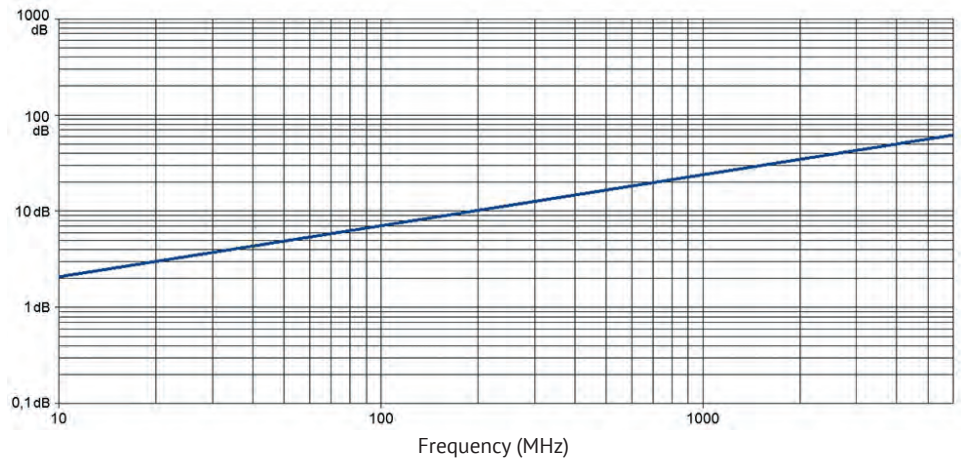

Typ. Return Loss

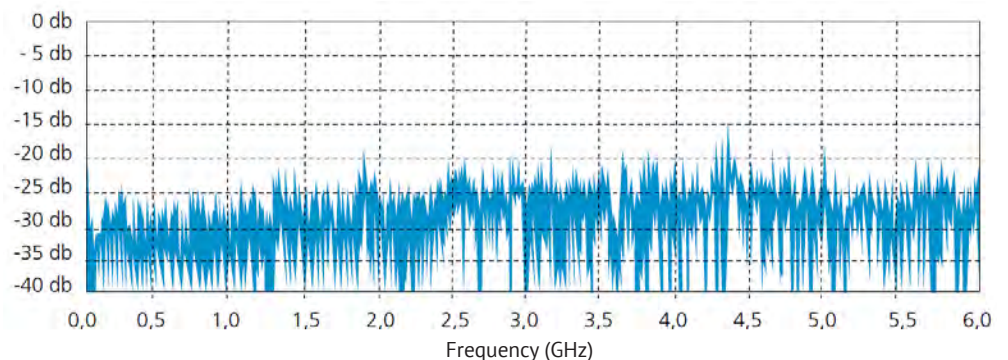

Aircell[®] 7 Heatex[®]

highly flexible, halogen-free, flame-retardant,
suitable for installation in buildings
and for railway applications



Aircell 7 Heatex is an ultraflexible coaxial cable designed for frequencies up to 6 GHz. Due to its low loss in relation to the outer diameter and the small bending radius the cable can be used for numerous RF applications.

The low attenuation of Aircell 7 Heatex is achieved by using advanced manufacturing techniques and low loss PE-LLC dielectric with a foaming rate of more than 70%. This unique dielectric also offers water resistance and long term stability. The inner conductor containing 19 stranded bare copper wires of low oxygen copper (OFC) provide the cable its remarkable flexibility. Further advantages of this cable include the use of double shielding which is constructed of overlapping 100 % tight copper foil and an additional shield braiding of bare copper wires with 85 % coverage. The copper foil has an applied PE coating which prevents foil cracking due to short radius bends. The jacket of the cable is made of a halogen-free and flame retardant copolymer. Due to this Heatex jacket, the cable has a low fire load, low flame propagation, limited smoke emission and reduced production of toxic and corrosive gases. With the fire protection rating Cca Aircell 7 Heatex is approved for installation in public buildings.

Aircell 7 Heatex is certified for railway applications for interior and exterior use according requirement sets R15 and R16 of the EN45545-2 standard.

Key features

Diameter	7,3 ± 0,2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	20,44 dB
f max	6 GHz
Euroclass according to EN 50575	Cca

Characteristics

- Certified according to EN 45545-2:2013+A1:2015 and EN 45545-2:2020 Requirement Sets R15 + R16 for railway applications
- Flame resistance tested according to EN 60332-1-2:2004 + A1:2015 + A11:2016 and EN 60332-1-3:2004 + A1:2015
- Smoke density tested according to DIN EN 61034-2:2005
- Smoke gas toxicity tested according to EN 50305:2002 Sec. 9.2
- Vertical flame spread tested according to EN 50305:2002 Sec. 9.1.1. (for cables with a diameter 6 mm < Ø < 12 mm)
- Halogen-free tested according to DIN EN 50306-1:2003
- Halogen acid gas content tested according to DIN EN 60754-1:2015 (HCl < 0.5 %)
- Acidity of the combustion gases tested according to DIN EN 60754-2:2015 (pH value > 4.3)
- Conductivity of the combustion gases tested according to DIN EN 60754-2:2015 (< 10.0 µS/mm)
- Fluorine content tested according to EN 60684-2:2011 Sec. 45.2 Procedure A (< 0.1 %).
- Jacket material according to DIN EN 50290-2-27 (HD 624.7)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- UV-resistant

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	1.9 mm (19 × 0.38 mm, 14 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	5.0 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	85 %
Outer conductor Ø	5.7 mm
Jacket	thermoplastic copolymer (FRNC) black
Weight	73 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-40 to +80 °C Storage, Installation, Operation
Pulling strength	300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 9.0 Ω/km
DC-resistance outer conductor	8.7 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	10 kV
Max. voltage	8 kV

Aircell 7 Heatex RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	2.09	2.00	5.00
100 MHz	5.97	7.00	17.00
500 MHz	13.98	17.00	39.00
1000 MHz	20.44	22.50	54.60
3000 MHz	38.84	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.52	1000 MHz	20.44
10 MHz	2.09	1296 MHz	23.60
50 MHz	4.29	1500 MHz	25.73
100 MHz	5.97	1800 MHz	28.50
144 MHz	7.22	2000 MHz	30.29
200 MHz	8.59	2400 MHz	33.82
300 MHz	10.64	3000 MHz	38.84
432 MHz	12.92	4000 MHz	46.66
500 MHz	13.98	5000 MHz	54.19
800 MHz	18.05	6000 MHz	61.66


Max. Power Handling (W at 40 °C)

10 MHz	2.040	2400 MHz	118
100 MHz	620	3000 MHz	104
500 MHz	260	4000 MHz	89
1000 MHz	191	5000 MHz	78
2000 MHz	131	6000 MHz	70

Typ. Attenuation (dB/100 m at 20 °C)

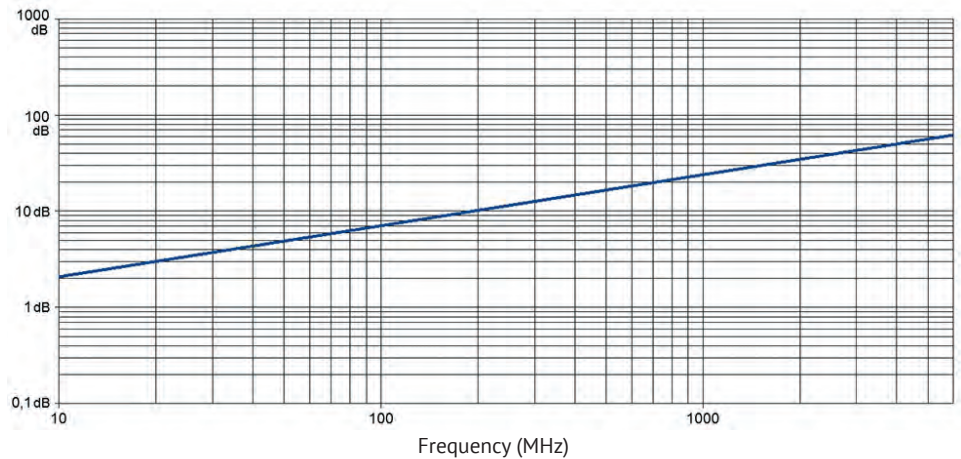

Typ. Return Loss

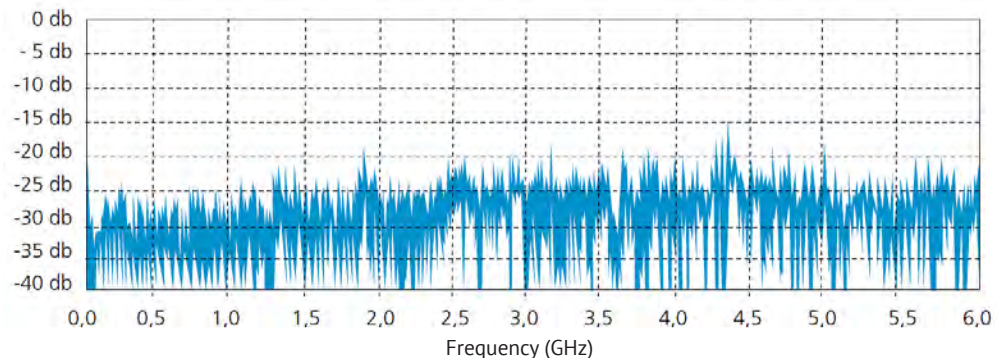

Aircom[®] Premium

very low-loss up to 12 GHz



Aircom Premium is an ultra-low attenuation coaxial cable with an upper frequency limit of 12 GHz. It is characterized by its low weight and very low attenuation. The highly precise-shaped aluminium inner conductor is surrounded by a copper foil that is applied and welded to the inner conductor. The skin effect ensures a high-performance RF transmission. The precise shapeability of the aluminium core is responsible for virtually no disturbances throughout the entire frequency range. Additionally, this new cable from the Aircom family is highly suitable for digital modulation methods, being very low in intermodulation.

The extremely low attenuation of Aircom Premium is achieved through a low attenuation PE dielectric. The material is also resistant to moisture. To achieve good shielding attenuation with low losses, the outer conductor of Aircom Premium is made of two layers of copper: a thin, overlapping copper foil is applied with a shielding braid covering 75 %. The foil is PE-coated on the inside, protecting against cracking in case of a one-time too small bending radius. The black PVC outer jacket of Aircom Premium is UV-stabilized.

Aircom Premium is a coaxial cable for most applications in telecommunications and radio technology: it is flexible, low in attenuation, and secure against radiation interference.

Key features

Diameter	10.2 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	11.88 dB
f max	12 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	Hybrid CCA – bare copper-clad aluminium wire
Inner conductor Ø	1 × 2.75 mm
Dielectric	blue foamed cellular polyethylene (PE) with skin
Dielectric Ø	7.2 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	7.9 mm
Jacket	PVC black, UV-stabilized
Weight	99 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	650 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 5.0 Ω/km
DC-resistance outer conductor	7.3 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	9 kV
Max. voltage	7 kV

Aircom Premium RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.05	2.00	5.00
100 MHz	3.42	7.00	17.00
500 MHz	8.08	17.00	39.00
1000 MHz	11.88	22.50	54.60
3000 MHz	21.85	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.03	1500 MHz	14.28
10 MHz	1.05	1800 MHz	16.16
50 MHz	2.09	2000 MHz	17.29
100 MHz	3.42	2400 MHz	19.00
144 MHz	3.90	3000 MHz	21.85
200 MHz	4.51	4000 MHz	25.65
300 MHz	5.70	5000 MHz	29.45
432 MHz	7.22	6000 MHz	33.25
500 MHz	8.08	8000 MHz	42.75
800 MHz	10.55	10000 MHz	57.00
1000 MHz	11.88	12000 MHz	71.25
1296 MHz	13.38		

Max. Power Handling (W at 40 °C)

10 MHz	4.700	3000 MHz	230
100 MHz	1400	4000 MHz	190
500 MHz	620	5000 MHz	170
1000 MHz	420	6000 MHz	150
2000 MHz	290	8000 MHz	130
2400 MHz	260	10000 MHz	100
		12000 MHz	80

Typ. Attenuation (dB/100 m at 20 °C)

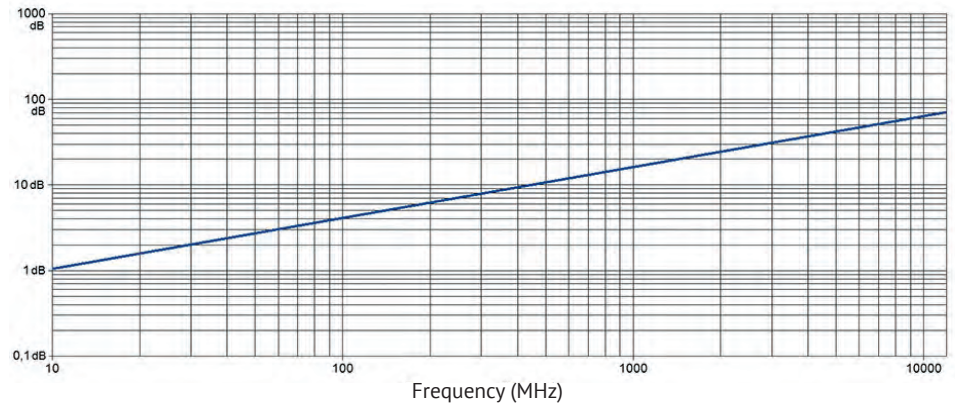

Aircom[®] Premium FRNC

ultra low-loss up to 12 GHz
and halogen-free



Aircom Premium FRNC is an ultra-low attenuation coaxial cable with an upper frequency limit of 12 GHz. It is characterized by its low weight and very low attenuation. The highly precise-shaped aluminium inner conductor is surrounded by a copper foil that is applied and welded to the inner conductor. The skin effect ensures a high-performance RF transmission. The precise shapeability of the aluminium core is responsible for virtually no disturbances throughout the entire frequency range. Additionally, this new cable from the Aircom family is highly suitable for digital modulation methods, being very low in intermodulation.

The extremely low attenuation of Aircom Premium FRNC is achieved through a low attenuation PE dielectric. The material is also resistant to moisture. To achieve good shielding attenuation with low losses, the outer conductor of Aircom Premium FRNC is made of two layers of copper: a thin, overlapping copper foil is applied with a shielding braid covering 75%. The foil is PE-coated on the inside, protecting against cracking in case of a one-time too small bending radius. The jacket of the cable is made of a special thermoplastic copolymer, the halogen-free, flame-retardant material FRNC (Flame Retardant Non Corrosive). This gives Aircom Premium FRNC a low fire load, low fire spread, and minimal smoke development.

Aircom Premium FRNC is a coaxial cable for most applications in telecommunications and radio technology: it is flexible, low in attenuation, and secure against radiation interference.

Key features

Diameter	10.2 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	11.88 dB
f max	12 GHz
Euroclass according to EN 50575	Fca

Characteristics

- Jacket material according to DIN EN 50290-2-27 (HD 624.7)
- Flame-retardant according to IEC 60332-1-2
- Manufactured according to DIN EN 45545-2 Table 5 R15 HL2
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- Corrosivity of the combustion gases according to IEC 60754-2
- Smoke density according to IEC 61034
- UV-resistant

Technical Data

Inner conductor	Hybrid CCA – bare copper-clad aluminium wire
Inner conductor Ø	1 × 2.75 mm
Dielectric	blue foamed cellular polyethylene (PE) with skin
Dielectric Ø	7.2 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	7.9 mm
Jacket	thermoplastic copolymer (FRNC) black
Weight	108 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	650 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 5.0 Ω/km
DC-resistance outer conductor	7.3 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	9 kV
Max. voltage	7 kV

Aircom Premium FRNC RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.05	2.00	5.00
100 MHz	3.42	7.00	17.00
500 MHz	8.08	17.00	39.00
1000 MHz	11.88	22.50	54.60
3000 MHz	21.85	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.03	1500 MHz	14.28
10 MHz	1.05	1800 MHz	16.16
50 MHz	2.09	2000 MHz	17.29
100 MHz	3.42	2400 MHz	19.00
144 MHz	3.90	3000 MHz	21.85
200 MHz	4.51	4000 MHz	25.65
300 MHz	5.70	5000 MHz	29.45
432 MHz	7.22	6000 MHz	33.25
500 MHz	8.08	8000 MHz	42.75
800 MHz	10.55	10000 MHz	57.00
1000 MHz	11.88	12000 MHz	71.25

Max. Power Handling (W at 40 °C)

10 MHz	4.700	3000 MHz	230
100 MHz	1400	4000 MHz	190
500 MHz	620	5000 MHz	170
1000 MHz	420	6000 MHz	150
2000 MHz	290	8000 MHz	130
2400 MHz	260	10000 MHz	100
		12000 MHz	80

Typ. Attenuation (dB/100 m at 20 °C)

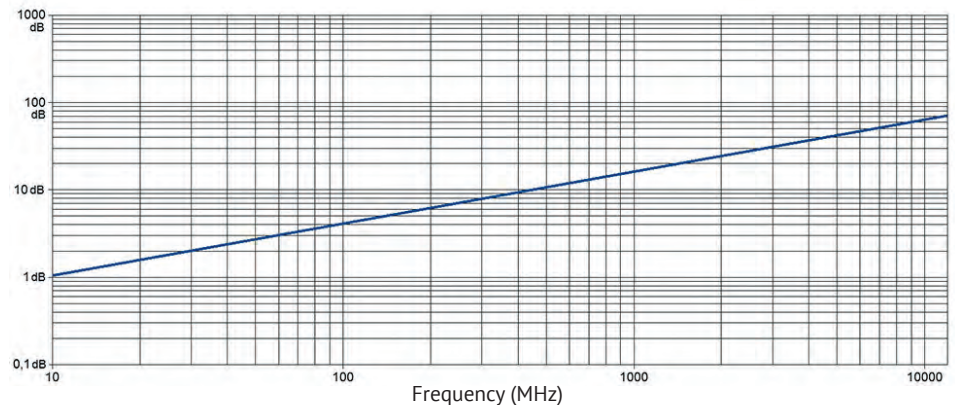

Aircom[®] 15

ultra low-loss up to 10 GHz



Aircom 15 is an ultra-low-loss coaxial cable designed for a maximum frequency of 10 GHz. It is distinguished by its lightweight construction and very low attenuation. This cable is precision-manufactured with a hybrid inner conductor made of copper-clad aluminum wire (CCA), where the copper cladding covers the inner aluminum core. The combination of copper's excellent electrical conductivity and aluminum's lightweight properties in this composite material makes Aircom 15 ideal for a wide range of RF applications.

The aluminum core's precise formability ensures minimal impurities across the entire frequency range, contributing to a high-performance RF line through the skin effect. Additionally, Aircom 15 is well-suited for digital transmission modes, thanks to its outstanding PIM (passive intermodulation) performance.

The cable's remarkably low attenuation is achieved through a low-loss PE dielectric, which also provides resistance to moisture. Aircom 15 features double shielding, comprising a thin, overlapping aluminum foil and an additional shield braiding made of tinned copper wires with 70% coverage. The black PVC jacket of Aircom 15 is UV-stabilized. This cable is particularly well-suited for mobile communication, antenna system installations, and various other RF and 5G applications.

Key features

Diameter	10.2 ± 0.3 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	8.7 dB
f max	10 GHz
Euroclass according to EN 50575	Fca

Characteristics

- Conductor material according to DIN EN 13602 Cu-ETP-A
- Screen material according to DIN EN 13602 Cu-ETP-A...-B
- Insulation material according to DIN EN 50290-2-23 (VDE 0819), Table L/MD (HD 624.3)
- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	Hybrid CCA – bare copper-clad aluminium wire
Inner conductor Ø	1 × 4.4 mm
Dielectric	blue foamed cellular polyethylene (PE) with skin
Dielectric Ø	11.3 mm
Outer conductor 1	aluminium-laminated foil overlapping
Shielding factor	100 %
Outer conductor 2	shield braiding of tinned copper wires
Shielding factor	70 %
Outer conductor Ø	12.1 mm
Jacket	PVC black, UV-stabilized
Weight	166 kg/km
Min. Bending radius	5 × Ø single, 10 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	1400 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 80 dB
DC-resistance inner conductor	≤ 2.0 Ω/km
DC-resistance outer conductor	5 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	9 kV
Max. voltage	7 kV

Aircom 15 RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	0.70	2.00	5.00
100 MHz	2.40	7.00	17.00
500 MHz	5.80	17.00	39.00
1000 MHz	8.70	22.50	54.60
3000 MHz	16.90	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

10 MHz	0.70	1296 MHz	10.00
20 MHz	0.90	1500 MHz	10.90
50 MHz	1.46	1800 MHz	12.20
100 MHz	2.40	2000 MHz	13.10
144 MHz	2.77	2400 MHz	14.70
200 MHz	3.25	3000 MHz	16.90
300 MHz	4.10	4000 MHz	20.20
432 MHz	5.23	5000 MHz	23.50
500 MHz	5.80	6000 MHz	26.50
800 MHz	7.60	8000 MHz	32.10
1000 MHz	8.70	10000 MHz	37.50

Max. Power Handling (W at 40 °C)


10 MHz	8700	3000 MHz	375
100 MHz	2660	5000 MHz	270
500 MHz	1100	6000 MHz	240
1000 MHz	740	8000 MHz	195
2000 MHz	470	10000 MHz	170
2400 MHz	430		

Typ. Attenuation (dB/100 m at 20 °C)

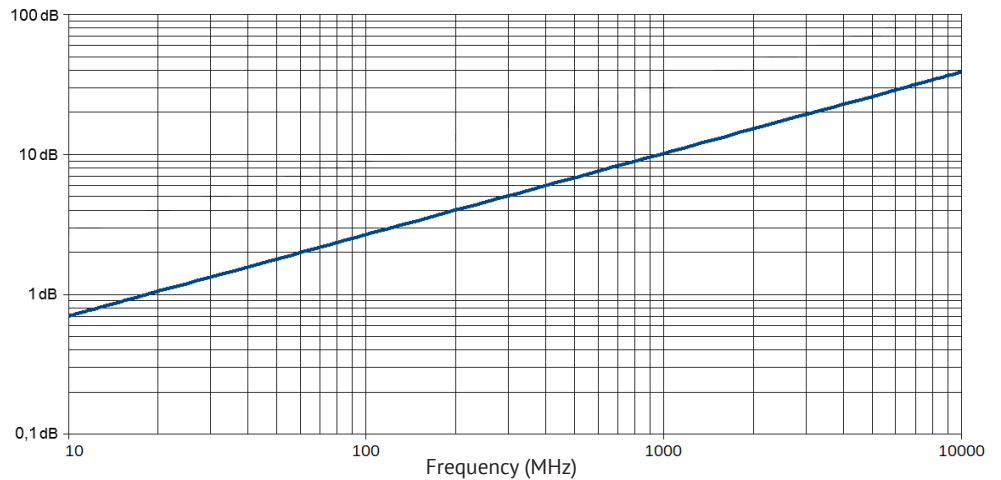

Ecoflex[®] 5

thin, very low-loss,
and extremely flexible

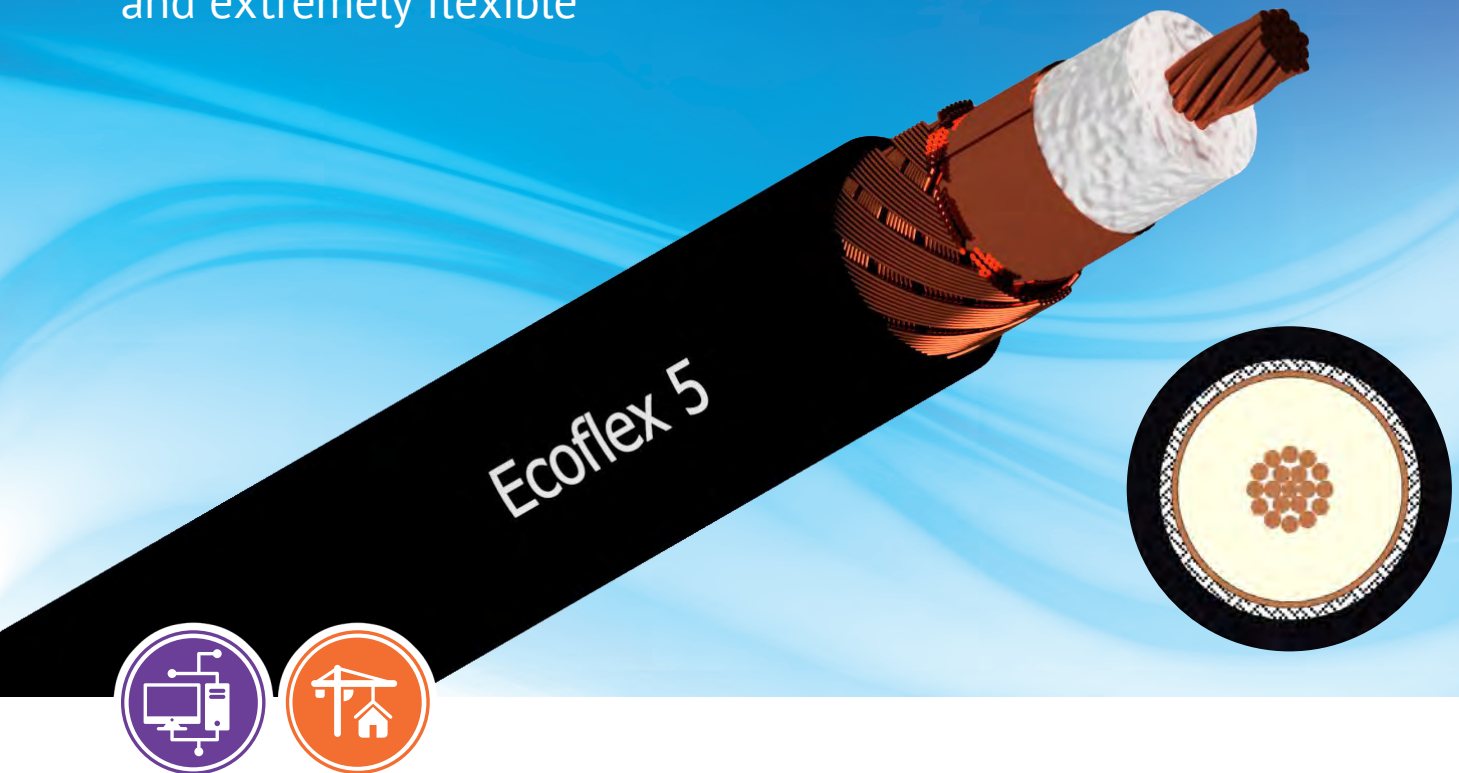

Ecoflex 5 is a thin and extremely flexible coaxial cable designed for frequencies up to 6 GHz. Due to its low loss in relation to the outer diameter of 5,5 mm and the very small bending radius the cable can be used for numerous RF applications.

The low attenuation values of Ecoflex 5 are achieved by using advanced manufacturing techniques and low loss PE-LLC dielectric with a foaming rate of more than 70 %. This unique dielectric also offers water resistance and long term stability. The inner conductor of Ecoflex 5 contains 19 stranded bare copper wires with diameter of 0,287 mm each, manufactured from low oxygen copper (OFC). Such inner conductor structure provide the cable its remarkable flexibility. Further advantages of this cable include the use of double shielding which is constructed of overlapping 100 % tight copper foil and an additional shield braiding of bare copper wires with 80 % coverage. The copper foil has an applied PE coating which prevents foil cracking due to short radius bends. The black PVC jacket of Ecoflex 5 is UV-stabilized.

Ecoflex 5 is an innovative coaxial cable, which is the right choice, when an extremely flexible, very low loss, and microwave rated cable is required. It can be used for numerous RF applications.

Key features

Diameter	5.0 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	26.13 dB
f max	6 GHz
Euroclass according to EN 50575	Fca

Characteristics

- Insulation material according to DIN EN 50290-2-23 (VDE 0819), Tab. 2/A (HD 624.3)
- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	1.44 mm (19 × 0.287 mm, 17 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	3.7 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	80 %
Outer conductor Ø	4.2 mm
Jacket	PVC black
Weight	42 kg/km
Min. Bending radius	5 × Ø single, 10 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	150 N

Electrical Data at 20 °C

Capacitance (1 kHz)	≈ 82 nF/km
Velocity factor	0.80
Shielding attenuation 1 GHz	≥ 85 dB
DC-resistance inner conductor	≤ 15 Ω/km
DC-resistance outer conductor	17 Ω/km
Insulation resistance	≥ 5 GΩ*km
Test Voltage DC (wire/screen)	4 kV
Max. voltage	2.5 kV

Ecoflex 5 RG 58/U RG 213/U

Capacitance	82 pF/m	102 pF/m	101 pF/m
Velocity factor	0.80	0.66	0.66
Attenuation (dB/100m)			
10 MHz	2.66	5.00	2.00
100 MHz	7.60	17.00	7.00
500 MHz	18.05	39.00	17.00
1000 MHz	26.13	54.60	22.50
3000 MHz	49.40	118.00	58.50


Typ. Attenuation (dB/100 m at 20 °C)

10 MHz	2.66	1000 MHz	26.13
20 MHz	3.80	1296 MHz	29.93
50 MHz	5.32	1500 MHz	32.59
100 MHz	7.60	1800 MHz	36.39
144 MHz	8.74	2000 MHz	38.95
200 MHz	10.21	2400 MHz	43.23
300 MHz	12.83	3000 MHz	49.40
432 MHz	16.29	4000 MHz	57.95
500 MHz	18.05	5000 MHz	66.03
800 MHz	22.90	6000 MHz	74.10

Max. Power Handling (W at 40 °C)

10 MHz	1.200	1000 MHz	123
20 MHz	914	2000 MHz	84
50 MHz	575	3000 MHz	67
100 MHz	405	4000 MHz	58
500 MHz	177	6000 MHz	45

Typ. Attenuation (dB/100 m at 20 °C)

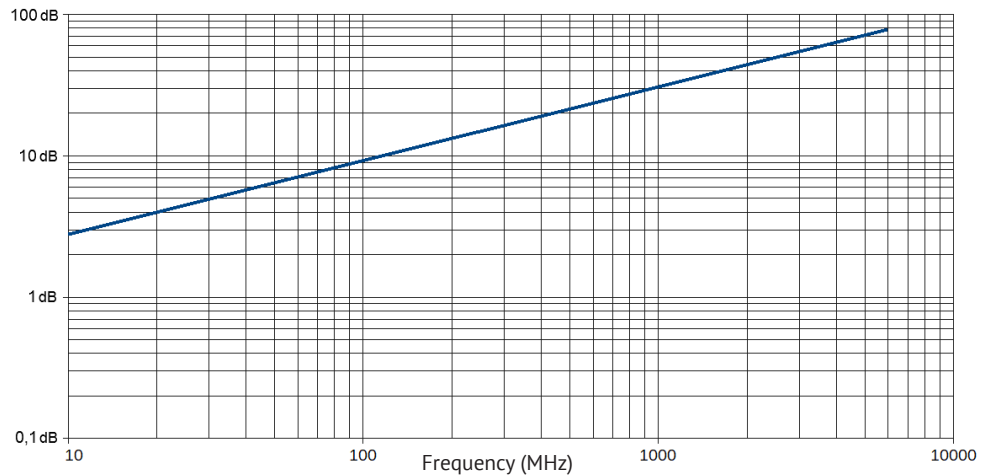

Ecoflex[®] 7

extremely low-loss and highly flexible



Ecoflex 7 is a highly flexible coaxial cable designed for the frequency range up to 6 GHz. The extremely low attenuation and small bending radius of this cable make it interesting and recommended for many applications in high-frequency technology.

The excellent attenuation values of Ecoflex 7 are achieved by using a low attenuation PE-LLC dielectric with a gas content of over 70 %. This material is also resistant to moisture. The inner conductor of Ecoflex 7 consists of 19 stranded wires with a diameter of 0.38 mm each, made of low-oxygen copper. This inner conductor structure allows for extraordinary flexibility of the cable. To achieve good shielding attenuation, the outer conductor of Ecoflex 7 is designed with two layers: a thin, overlapping copper foil is covered with a copper shielding braid with a covering degree of 85 %.

The foil is PE-coated on the inside, protecting it against cracking in case of a too small bending radius. The black PVC outer jacket of Ecoflex 7 is UV-stabilized.

Ecoflex 7 is an innovative and versatile coaxial cable suitable for numerous applications, being extremely flexible, extremely low in attenuation, and radiation-resistant.

Key features

Diameter	7,3 ± 0,2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	18,43 dB
f max	6 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Conductor/screen material according to DIN EN 13602 Cu-ETP-A
- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- Flame-retardant according to ECE-R 118 Amendment Series 02, Paragraph 6.2.6 with ISO 6722-1:2012 Paragraph 12
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	1.9 mm (19 × 0.38 mm, 14 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	5.0 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	85 %
Outer conductor Ø	5.7 mm
Jacket	PVC black, UV-resistant
Weight	70 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 9.0 Ω/km
DC-resistance outer conductor	8.7 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	10 kV
Max. voltage	8 kV

Ecoflex 7 RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.88	2.00	5.00
100 MHz	5.37	7.00	17.00
500 MHz	12.59	17.00	39.00
1000 MHz	18.43	22.50	54.60
3000 MHz	34.96	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.33	1000 MHz	18.43
10 MHz	1.88	1296 MHz	20.71
50 MHz	3.33	1500 MHz	22.99
100 MHz	5.37	1800 MHz	25.46
144 MHz	6.08	2000 MHz	27.27
200 MHz	7.13	2400 MHz	30.40
300 MHz	8.93	3000 MHz	34.96
432 MHz	11.40	4000 MHz	41.99
500 MHz	12.59	5000 MHz	48.83
800 MHz	15.96	6000 MHz	55.48


Max. Power Handling (W at 40 °C)

10 MHz	2.040	2400 MHz	118
100 MHz	620	3000 MHz	104
500 MHz	260	4000 MHz	89
1000 MHz	191	5000 MHz	78
2000 MHz	131	6000 MHz	70

Typ. Attenuation (dB/100 m at 20 °C)

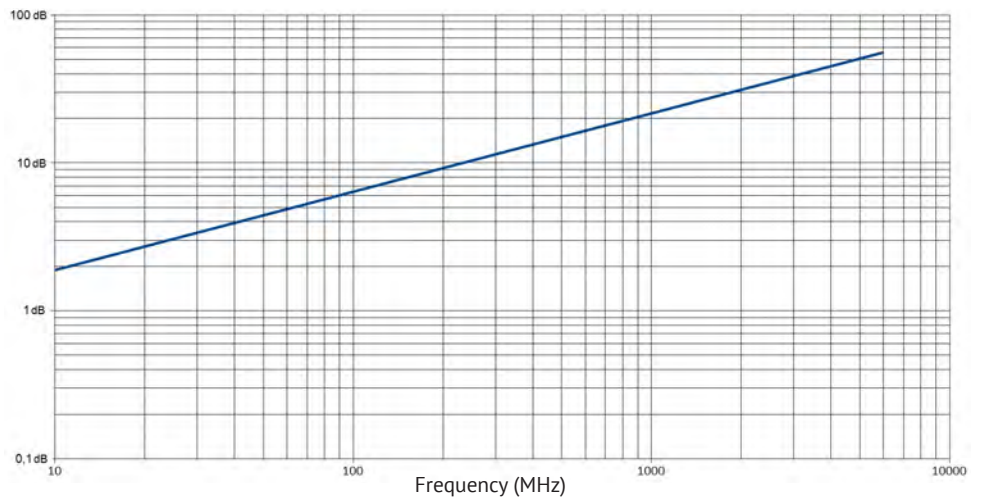

Typ. Return Loss

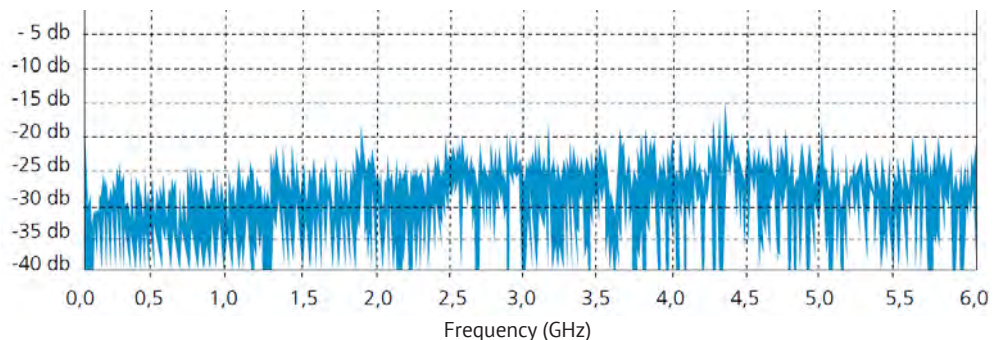

Ecoflex[®] 10

extremely flexible and low-loss



Ecoflex 10 is a flexible and very low-loss 50 ohm coaxial cable designed for the frequency range up to 6 GHz. State-of-the-art production methods and the use of a low attenuation PE-LLC dielectric with a gas content of over 70% enable low attenuation values that set standards for flexible coaxial cables of this size.

The high flexibility of Ecoflex 10 is ensured by a 7-strand stranded inner conductor made of low-oxygen copper. The inner conductor is compressed, calibrated, and then provided with a pre-coating in a special process to achieve good attenuation and matching values. Another advantage is the double shielding: an overlapping copper foil and an overlying copper braid ensure a high shielding effectiveness of > 90 dB at 1 GHz.

The black PVC outer jacket of Ecoflex 10 is UV-stabilized. To simplify installation, a high-quality solder-free N connector has been developed, which can be assembled in a few minutes without special tools. Ecoflex 10 is a modern coaxial cable for all applications in high-frequency technology: low attenuation, flexible, radiation-resistant, and usable into the microwave range.

Key features

Diameter	10.2 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	13.49 dB
f max	6 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Conductor material according to DIN EN 13602 Cu-ETP-A
- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- Flame-retardant according to UN/ECE-R 118:2019-06 § 6.2.6, ISO 6722-1:2011-10 § 5.22
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	2.85 mm (7 × 1.0 mm, 10 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	7.2 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	7.9 mm
Jacket	PVC black, UV-stabilized
Weight	129 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	600 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 3.5 Ω/km
DC-resistance outer conductor	6.6 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 10 RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.14	2.00	5.00
100 MHz	3.80	7.00	17.00
500 MHz	9.12	17.00	39.00
1000 MHz	13.49	22.50	54.60
3000 MHz	25.37	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.76	1000 MHz	13.49
10 MHz	1.14	1296 MHz	15.68
50 MHz	2.66	1500 MHz	17.01
100 MHz	3.80	1800 MHz	18.91
144 MHz	4.66	2000 MHz	20.14
200 MHz	5.51	2400 MHz	22.42
300 MHz	6.94	3000 MHz	25.37
432 MHz	8.46	4000 MHz	29.55
500 MHz	9.12	5000 MHz	33.44
800 MHz	11.88	6000 MHz	37.05


Max. Power Handling (W at 40 °C)

10 MHz	3.960	2400 MHz	210
100 MHz	1.210	3000 MHz	180
500 MHz	510	4000 MHz	150
1000 MHz	350	5000 MHz	130
2000 MHz	230	6000 MHz	120

Typ. Attenuation (dB/100 m at 20 °C)

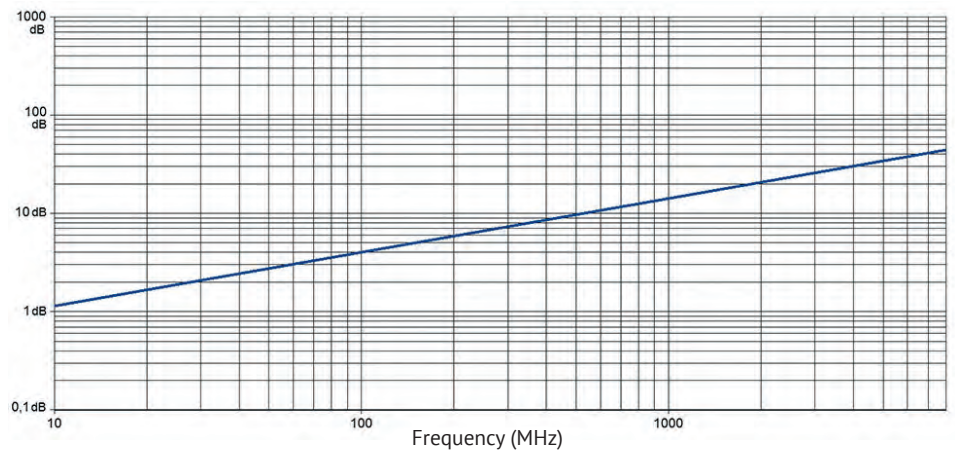

Typ. Return Loss

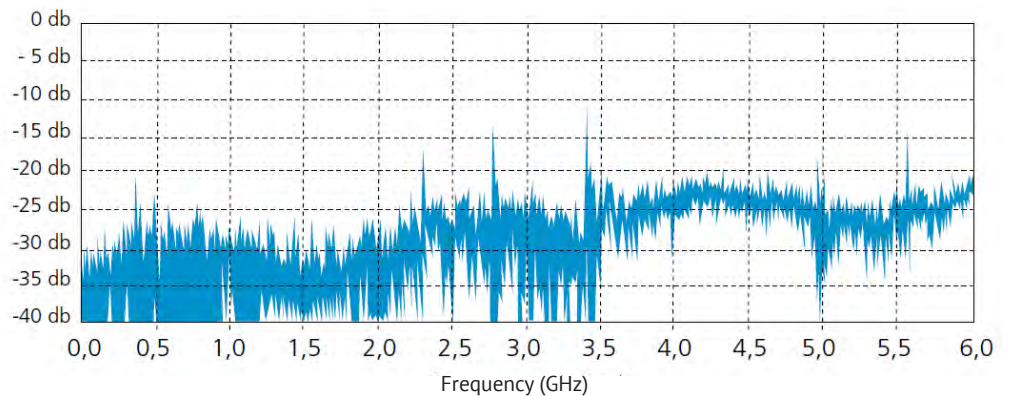

Ecoflex[®] 10 FRNC

extremely flexible, low-loss
and halogen-free



Ecoflex 10 FRNC is a flexible and very low-loss 50 ohm coaxial cable designed for the frequency range up to 6 GHz. State-of-the-art production methods and the use of a low attenuation PE-LLC dielectric with a gas content of over 70% enable low attenuation values that set standards for flexible coaxial cables of this size.

The high flexibility of Ecoflex 10 FRNC is ensured by a 7-strand stranded inner conductor made of low-oxygen copper. The inner conductor is compressed, calibrated, and then provided with a pre-coating in a special process to achieve good attenuation and matching values. Another advantage is the double shielding: an overlapping copper foil and an overlying copper braid ensure a high shielding effectiveness of > 90 dB at 1 GHz.

The jacket of the cable is made of a special thermoplastic copolymer, the halogen-free, flame-retardant material FRNC (Flame Retardant Non Corrosive). Therefore, Ecoflex 10 FRNC has low fire load, low fire propagation, and minimal smoke production. Due to the fire protection class Cca, Ecoflex 10 FRNC is suitable for installation in public buildings.

Key features

Diameter	10.2 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	13.49 dB
f max	6 GHz
Euroclass according to EN 50575	Cca

Characteristics

- Certified according to EN 50575:2014 + A1:2016 for applications in buildings with requirements for fire behavior
- Flame retardancy tested according to DIN EN 60332-1-2:2005-06 + DIN EN 60332-1-1:2017-09
- Heat release tested according to DIN EN 50399:2017-02
- Vertical flame spread tested according to DIN EN 50399:2017-02
- Smoke production tested according to DIN EN 50399:2017-02
- Burning droplets tested according to DIN EN 50399:2017-02
- Acidity of combustion gases tested according to DIN EN 60754-2:2015-08 (pH value > 4.3)
- Conductivity of combustion gases tested according to DIN EN 60754-2:2015-08 (< 2.5 µS/mm)
- Smoke density according to IEC 61034
- Jacket material according to DIN EN 50290-2-27 (HD 624.7)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- UV-resistant
- Manufactured according to DIN EN 45545-2 Table 5 R15 HL2

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	2.85 mm (7 × 1.0 mm, 10 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	7.2 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	7.9 mm
Jacket	highly flexible thermoplastic copolymer (FRNC) black
Weight	136 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	600 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 3.5 Ω/km
DC-resistance outer conductor	6.6 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 10 FRNC RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.14	2.00	5.00
100 MHz	3.80	7.00	17.00
500 MHz	9.12	17.00	39.00
1000 MHz	13.49	22.50	54.60
3000 MHz	25.37	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.76	1000 MHz	13.49
10 MHz	1.14	1296 MHz	15.68
50 MHz	2.66	1500 MHz	17.01
100 MHz	3.80	1800 MHz	18.91
144 MHz	4.66	2000 MHz	20.14
200 MHz	5.51	2400 MHz	22.42
300 MHz	6.94	3000 MHz	25.37
432 MHz	8.46	4000 MHz	29.55
500 MHz	9.12	5000 MHz	33.44
800 MHz	11.88	6000 MHz	37.05


Max. Power Handling (W at 40 °C)

10 MHz	3.960	2400 MHz	210
100 MHz	1.210	3000 MHz	180
500 MHz	510	4000 MHz	150
1000 MHz	350	5000 MHz	130
2000 MHz	230	6000 MHz	120

Typ. Attenuation (dB/100 m at 20 °C)

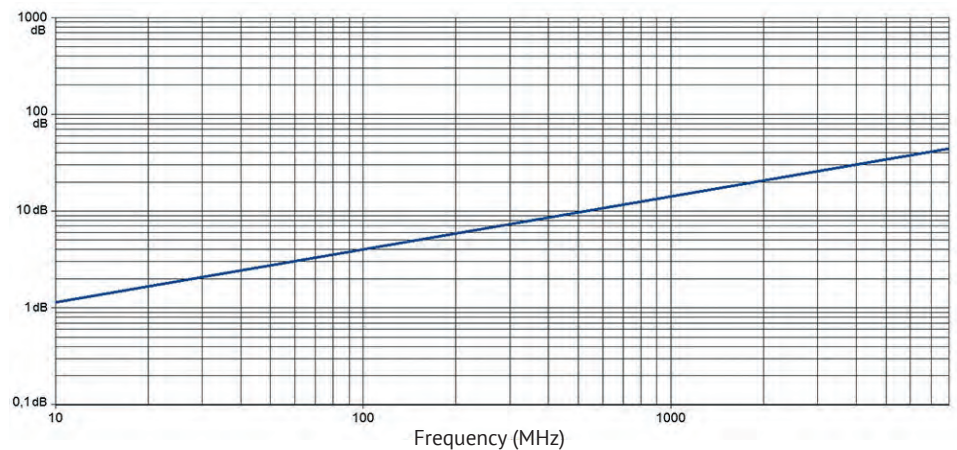


Typ. Return Loss

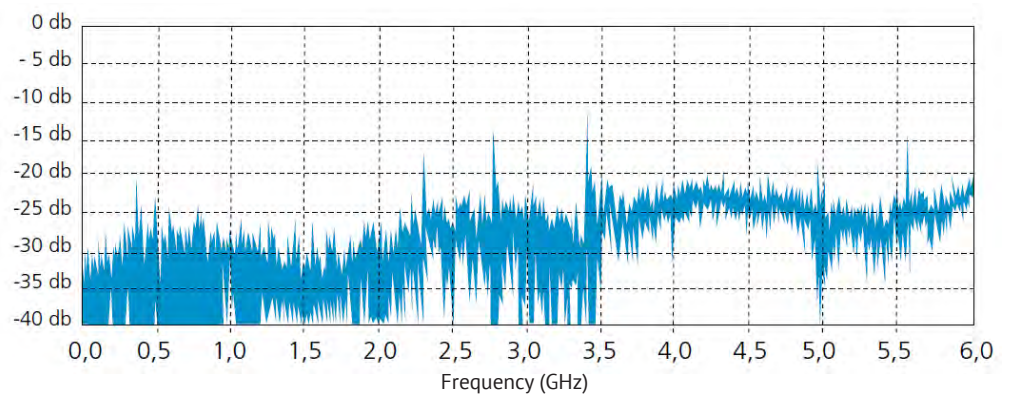

Ecoflex[®] 10 Plus

extremely flexible, low-loss,
and suitable for up to 8 GHz

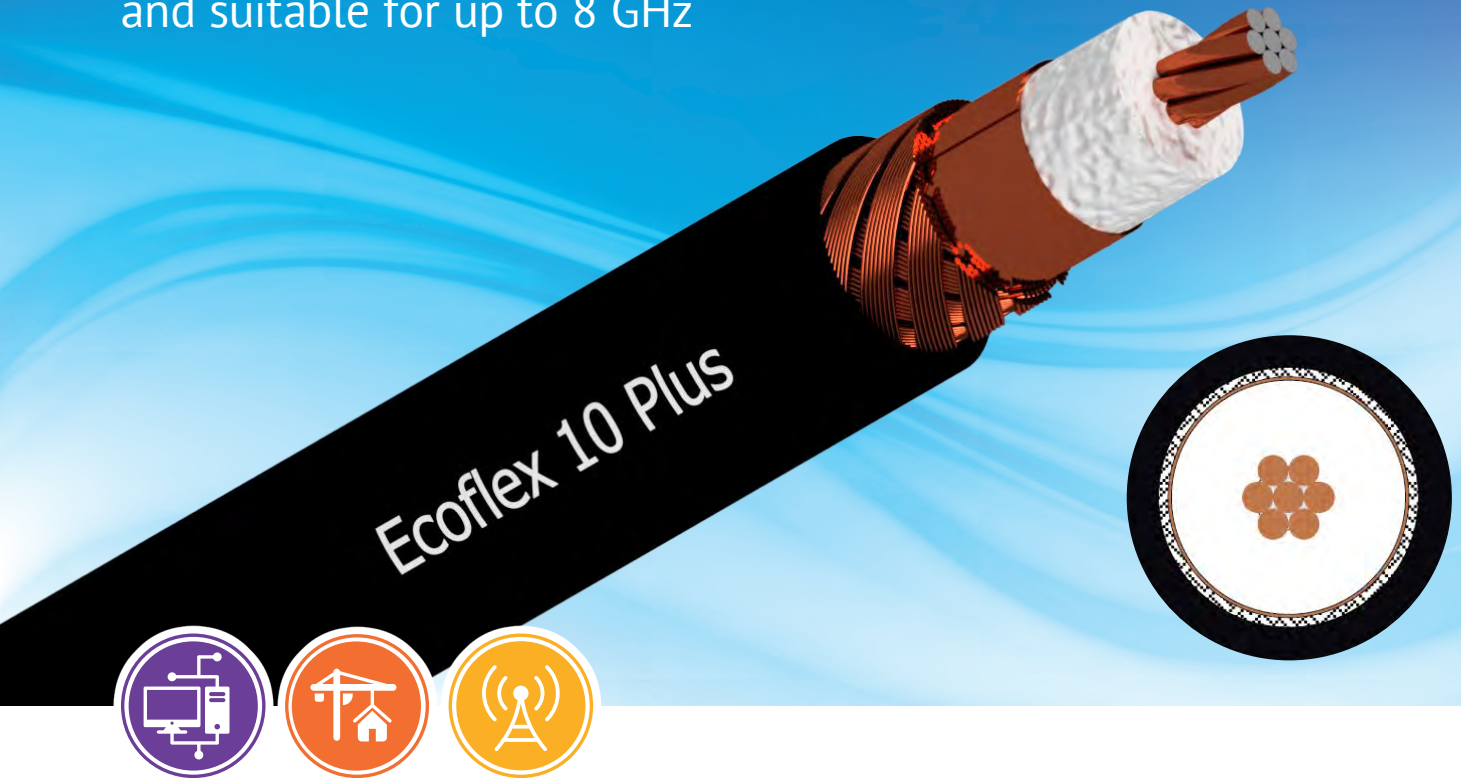

Ecoflex 10 Plus is a highly flexible, low-loss coaxial cable specifically designed for operation up to 8 GHz. State-of-the-art production methods and the use of a low attenuation PE-LLC dielectric with a gas content of over 70% enable very low attenuation values. The Ecoflex 10 Plus sets new standards for flexible coaxial cables.

The high flexibility of Ecoflex 10 Plus is ensured by a 7-strand hybrid inner conductor with an aluminium core and welded copper jacket. The inner conductor is twisted, compressed, calibrated, and then provided with a pre-coating in precise production steps to achieve very good attenuation and matching values. Another advantage is the double shielding. An overlapping copper foil and an overlying copper braid ensure a high shielding effectiveness of > 90 dB at 1 GHz. The copper foil has a PE coating that prevents cracks in the copper foil from forming due to small bending radii. The black PVC outer jacket of Ecoflex 10 Plus is UV-stabilized.

In addition to a complete range of standard connectors, a user-friendly solder-free N connector has been specially developed for the Ecoflex 10 Plus. The connector can be installed in a few minutes without special tools. Ecoflex 10 Plus is the innovative coaxial cable for all applications in high-frequency technology: low attenuation, ultra-flexible, radiation-resistant, and usable in the microwave range.

Key features

Diameter	10.2 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	13.49 dB
f max	8 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	Hybrid CCA – copper-clad aluminium stranded wire
Inner conductor Ø	2.85 mm (7 × 1.0 mm, 10 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	7.2 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	7.9 mm
Jacket	PVC black, UV-stabilized
Weight	96 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	600 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 5.4 Ω/km
DC-resistance outer conductor	6.6 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 10 Plus RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.14	2.00	5.00
100 MHz	3.80	7.00	17.00
500 MHz	9.12	17.00	39.00
1000 MHz	13.49	22.50	54.60
3000 MHz	25.37	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.76	1000 MHz	13.49
10 MHz	1.14	1296 MHz	15.68
50 MHz	2.66	1500 MHz	17.01
100 MHz	3.80	1800 MHz	18.91
144 MHz	4.66	2000 MHz	20.14
200 MHz	5.51	2400 MHz	22.42
300 MHz	6.94	3000 MHz	25.37
432 MHz	8.46	4000 MHz	29.55
500 MHz	9.12	5000 MHz	33.44
800 MHz	11.88	6000 MHz	37.05
		8000 MHz	44.08


Max. Power Handling (W at 40 °C)

10 MHz	3.100	2400 MHz	175
100 MHz	960	3000 MHz	154
500 MHz	413	4000 MHz	130
1000 MHz	285	5000 MHz	115
2000 MHz	194	6000 MHz	100
		8000 MHz	86

Typ. Attenuation (dB/100 m at 20 °C)

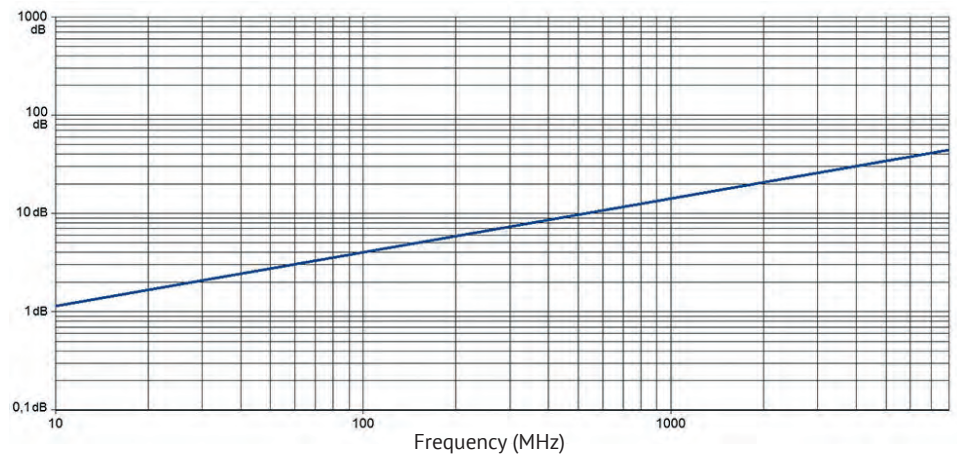

Typ. Return Loss

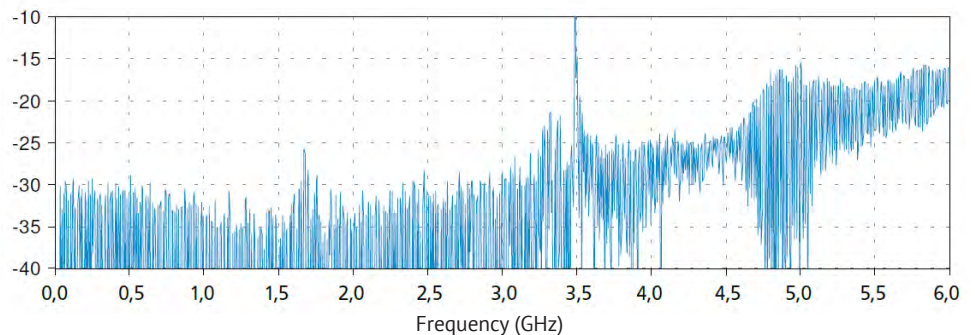

Ecoflex[®] 10 Plus Heatex[®]

flame-retardant, halogen-free,
suitable for installation in buildings
and for railway applications



Ecoflex 10 Plus Heatex is a halogen-free and flame-retardant coaxial cable designed for installation in buildings, facilities, and high-risk areas.

Ecoflex cables with Heatex jackets are flame-resistant and have minimal fire propagation. Heatex jackets are low-smoke, ensuring visibility of escape routes in case of a fire. Heatex jackets are halogen-free and do not contain reactive elements such as fluorine, chlorine, and bromine. They do not produce corrosive gases that could lead to significant property damage. The UV stability of the robust Heatex jacket allows for exterior use without limitations.

Ecoflex 10 Plus Heatex features a 7-strand hybrid inner conductor with an aluminium core and welded copper jacket. The surface characteristics and corresponding RF properties are significantly better than those of conventional copper strands. Another advantage is the double shielding: an overlapping copper foil and an overlying copper braid ensure a high shielding effectiveness of > 90 dB at 1 GHz.

Due to its Cca fire protection class, Ecoflex 10 Plus Heatex is suitable for installation in public buildings. Ecoflex 10 Plus Heatex is certified for railway applications for interior/ exterior use according to the R15 and R16 requirement sets of EN 45545-2 standard.

Key features

Diameter	10.2 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	13.49 dB
f max	8 GHz
Euroclass according to EN 50575	Cca

Characteristics

- Certified according to EN 45545-2:2013+A1:2015 and EN 45545-2:2020 Requirement Sets R15 + R16 for railway applications
- Flame resistance tested according to EN 60332-1-2:2004 + A1:2015 + A11:2016 and EN 60332-1-3:2004 + A1:2015
- Smoke density tested according to DIN EN 61034-2:2005
- Smoke gas toxicity tested according to EN 50305:2002 Sec. 9.2
- Vertical flame spread tested according to EN 50305:2002 Sec. 9.1.1. (for cables with a diameter 6 mm < Ø < 12 mm)
- Halogen-free tested according to DIN EN 50306-1:2003
- Halogen acid gas content tested according to DIN EN 60754-1:2015 (HCl < 0.5 %)
- Acidity of the combustion gases tested according to DIN EN 60754-2:2015 (pH value > 4.3)
- Conductivity of the combustion gases tested according to DIN EN 60754-2:2015 (< 10.0 µS/mm)
- Fluorine content tested according to EN 60684-2:2011 Sec. 45.2 Procedure A (< 0.1 %)
- Jacket material according to DIN EN 50290-2-27 (HD 624.7)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- UV-resistant

Technical Data

Inner conductor	Hybrid CCA – copper-clad aluminium stranded wire
Inner conductor Ø	2.85 mm (7 × 1.0 mm, 10 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	7.2 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	7.9 mm
Jacket	highly flexible thermoplastic copolymer (FRNC) black
Weight	106 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	600 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 5.1 Ω/km
DC-resistance outer conductor	6.6 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 10 Plus Heatex RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.14	2.00	5.00
100 MHz	3.80	7.00	17.00
500 MHz	9.12	17.00	39.00
1000 MHz	13.49	22.50	54.60
3000 MHz	25.37	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.76	1000 MHz	13.49
10 MHz	1.14	1296 MHz	15.68
50 MHz	2.66	1500 MHz	17.01
100 MHz	3.80	1800 MHz	18.91
144 MHz	4.66	2000 MHz	20.14
200 MHz	5.51	2400 MHz	22.42
300 MHz	6.94	3000 MHz	25.37
432 MHz	8.46	4000 MHz	29.55
500 MHz	9.12	5000 MHz	33.44
800 MHz	11.88	6000 MHz	37.05
		8000 MHz	44.08


Max. Power Handling (W at 40 °C)

10 MHz	3.100	2400 MHz	175
100 MHz	960	3000 MHz	154
500 MHz	413	4000 MHz	130
1000 MHz	285	5000 MHz	115
2000 MHz	194	6000 MHz	100
		8000 MHz	86

Typ. Attenuation (dB/100 m at 20 °C)

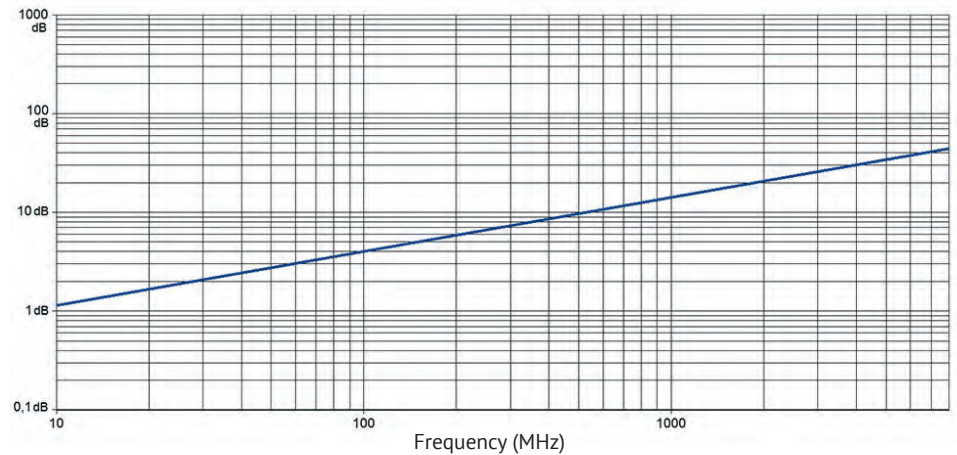

Typ. Return Loss

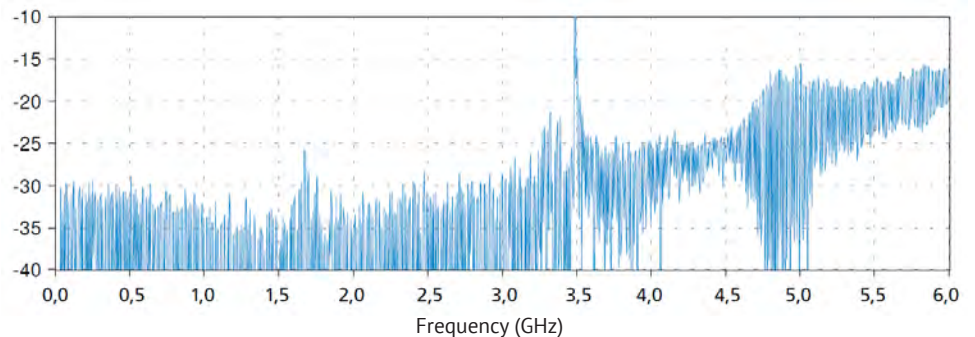

Ecoflex[®] 15

flexible, low-loss,
and stray radiation resistant



Ecoflex 15 is a flexible and very low-loss 50 ohm coaxial cable for the frequency range up to 6 GHz. State-of-the-art production methods and the use of a low attenuation PE-LLC dielectric with a gas content of over 70 % enable low attenuation values.

The special design of Ecoflex 15 combines the excellent attenuation values of rigid 1/2" cables with a solid inner conductor with the easy installation of flexible coaxial cables with stranded inner conductors. The good flexibility of Ecoflex 15 is ensured by a 7-strand stranded inner conductor made of low-oxygen copper. The inner conductor is compressed, calibrated, and then coated with a pre-coating in a special process to achieve good attenuation and matching values. Another advantage is the double shielding: an overlapping copper foil and an overlying copper braid ensure a high shielding effectiveness of > 90 dB at 1 GHz.

The black PVC outer jacket of Ecoflex 15 is UV-stabilized. To simplify installation, solder-free connectors of the N, UHF, and 7-16 DIN standards have been developed, which can be assembled without special tools in a short time. Ecoflex 15 is a modern coaxial cable for all applications in high-frequency technology: low attenuation, flexible, electromagnetic interference-resistant, and usable up to the microwave range.

Especially for longer runs and critical connections where every "dB" counts, Ecoflex 15 offers significant advantages.

Key features

Diameter	14.6 ± 0.3 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	9.80 dB
f max	6 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	4.5 mm (7 × 1.5 mm)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	11.3 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	12.1 mm
Jacket	PVC black, UV-stabilized
Weight	245 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	1300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 1.5 Ω/km
DC-resistance outer conductor	5.0 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 15 RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	0.86	2.00	5.00
100 MHz	2.81	7.00	17.00
500 MHz	6.70	17.00	39.00
1000 MHz	9.80	22.50	54.60
3000 MHz	18.30	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.60	1000 MHz	9.80
10 MHz	0.86	1296 MHz	11.40
50 MHz	1.96	1500 MHz	12.40
100 MHz	2.81	1800 MHz	13.80
144 MHz	3.40	2000 MHz	14.60
200 MHz	4.05	2400 MHz	16.20
300 MHz	5.00	3000 MHz	18.30
432 MHz	6.10	4000 MHz	21.60
500 MHz	6.70	5000 MHz	24.60
800 MHz	8.60	6000 MHz	27.50


Max. Power Handling (W at 40 °C)

10 MHz	6.327	2400 MHz	326
100 MHz	1.928	3000 MHz	284
500 MHz	810	4000 MHz	237
1000 MHz	547	5000 MHz	206
2000 MHz	364	6000 MHz	183

Typ. Attenuation (dB/100 m at 20 °C)

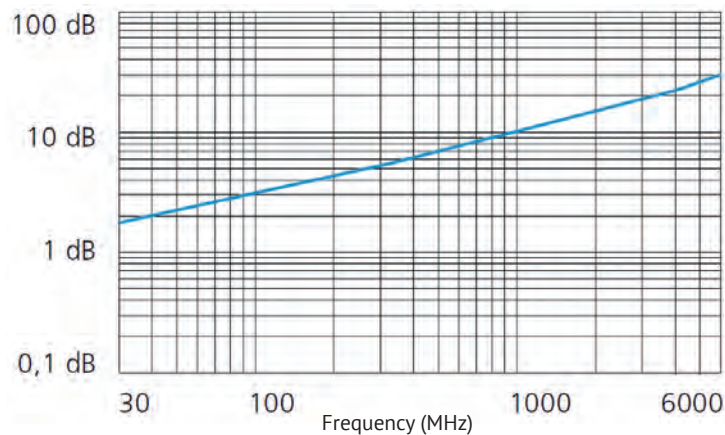

Typ. Return Loss

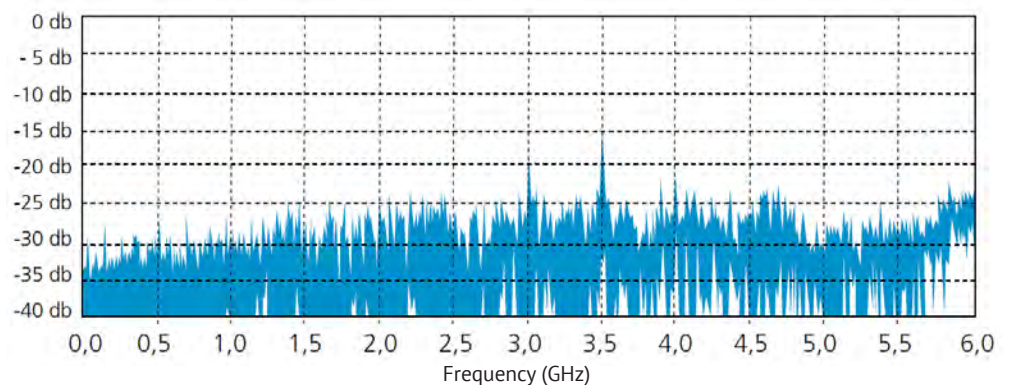

Ecoflex[®] 15 FRNC

flexible, very low-loss, stray radiation resistant,
and halogen-free



Ecoflex 15 FRNC is a flexible and very low attenuation 50 ohm coaxial cable for the frequency range up to 6 GHz. State-of-the-art production methods and the use of a low attenuation PE-LLC dielectric with a gas content of over 70% enable low attenuation values.

The special design of Ecoflex 15 FRNC combines the excellent attenuation values of rigid 1/2" cables with a solid inner conductor with the easy installation of flexible coaxial cables with stranded inner conductors. The good flexibility of Ecoflex 15 FRNC is ensured by a 7-strand stranded inner conductor made of low-oxygen copper. The inner conductor is compressed, calibrated, and then coated with a pre-coating in a special process to achieve good attenuation and matching values. Another advantage is the double shielding: an overlapping copper foil and an overlying copper braid ensure a high shielding effectiveness of > 90 dB at 1 GHz.

The outer jacket of the cable is made of a special thermoplastic copolymer, the halogen-free, flame-retardant material FRNC (Flame Retardant Non Corrosive). This makes Ecoflex 15 FRNC have a low fire load, low flame spread, and minimal smoke development. Due to the fire protection class Cca, Ecoflex 15 FRNC is suitable for installation in public buildings.

Key features

Diameter	14.6 ± 0.3 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	9.80 dB
f max	6 GHz
Euroclass according to EN 50575	Cca

Characteristics

- Certified according to EN 50575:2014 + A1:2016 for applications in buildings with requirements for fire behavior
- Flame retardancy tested according to DIN EN 60332-1-2:2005-06 + DIN EN 60332-1-1:2017-09
- Heat release tested according to DIN EN 50399:2017-02
- Vertical flame spread tested according to DIN EN 50399:2017-02
- Smoke production tested according to DIN EN 50399:2017-02
- Burning droplets tested according to DIN EN 50399:2017-02
- Acidity of combustion gases tested according to DIN EN 60754-2:2015-08 (pH value > 4.3)
- Conductivity of combustion gases tested according to DIN EN 60754-2:2015-08 (< 2.5 µS/mm)
- Smoke density according to IEC 61034
- Jacket material according to DIN EN 50290-2-27 (HD 624.7)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- UV-resistant
- Manufactured according to DIN EN 45545-2 Table 5 R15 HL2

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	4.5 mm (7 × 1.5 mm)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	11.3 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	12.1 mm
Jacket	highly flexible thermoplastic copolymer (FRNC) black
Weight	184 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	1300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 2.5 Ω/km
DC-resistance outer conductor	5.0 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 15 FRNC RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	0.86	2.00	5.00
100 MHz	2.81	7.00	17.00
500 MHz	6.70	17.00	39.00
1000 MHz	9.80	22.50	54.60
3000 MHz	18.30	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.60	1000 MHz	9.80
10 MHz	0.86	1296 MHz	11.40
50 MHz	1.96	1500 MHz	12.40
100 MHz	2.81	1800 MHz	13.80
144 MHz	3.40	2000 MHz	14.60
200 MHz	4.05	2400 MHz	16.20
300 MHz	5.00	3000 MHz	18.30
432 MHz	6.10	4000 MHz	21.60
500 MHz	6.70	5000 MHz	24.60
800 MHz	8.60	6000 MHz	27.50


Max. Power Handling (W at 40 °C)

10 MHz	6.327	2400 MHz	326
100 MHz	1.928	3000 MHz	284
500 MHz	810	4000 MHz	237
1000 MHz	547	5000 MHz	206
2000 MHz	364	6000 MHz	183

Typ. Attenuation (dB/100 m at 20 °C)

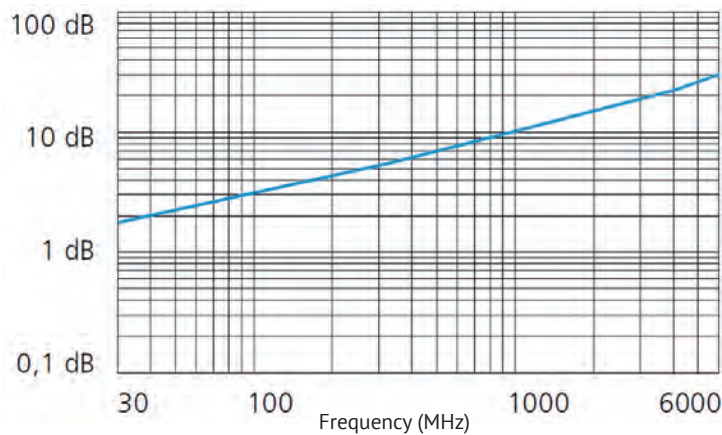


Typ. Return Loss

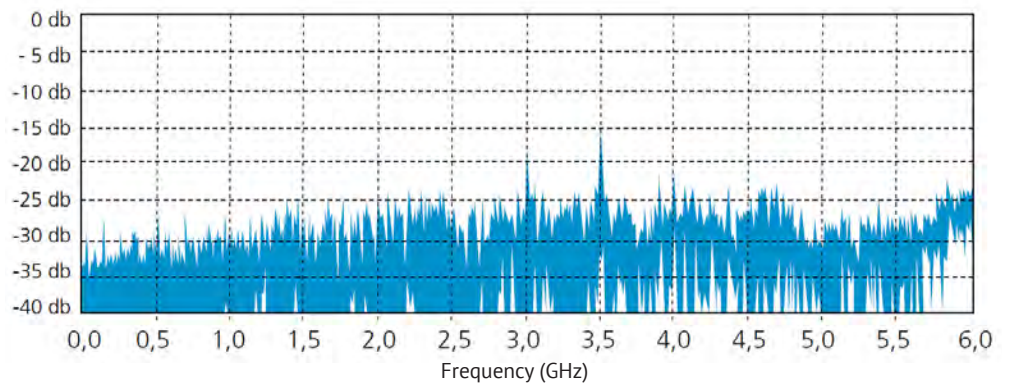

Ecoflex[®] 15 Plus

extremely flexible, low-loss,
and suitable for operation up to 8 GHz

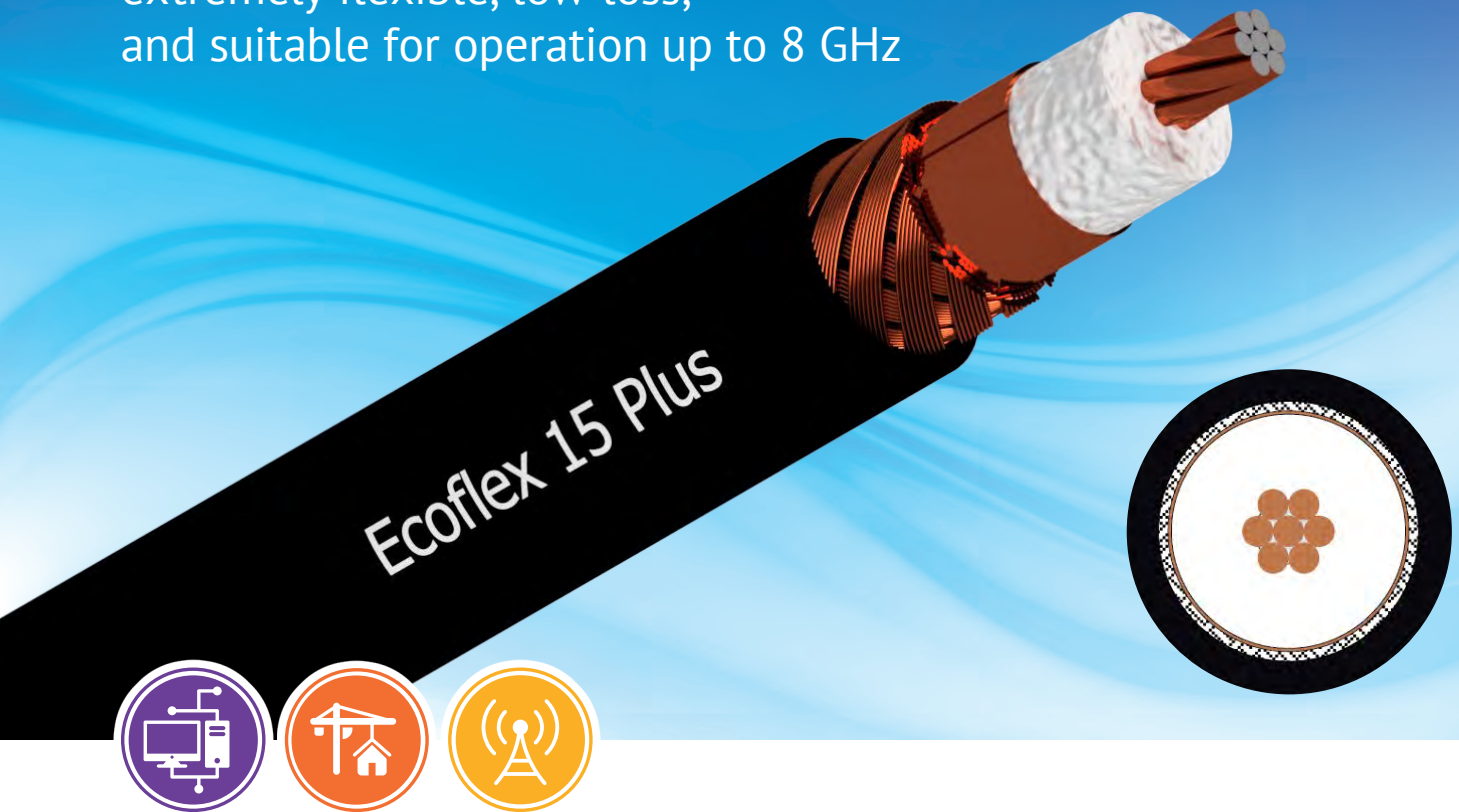

Ecoflex 15 Plus features remarkable electrical and mechanical improvements. The design and use of materials are optimized for minimal loss, an increased maximum frequency by 2 GHz, excellent installation properties, high long-term stability, and, not least, low weight. These optimal physical properties are achieved by using a precision hybrid inner conductor with a micro-welded copper jacket and aluminium core.

Ecoflex 15 Plus is an extremely flexible and very low attenuation 50-ohm coaxial cable for use up to 8 GHz. State-of-the-art production methods and the use of a low attenuation PE-LLC dielectric with a gas content of over 70% enable very favorable attenuation values. The innovative design of Ecoflex 15 Plus combines the extremely low attenuation properties of 1/2" cables with rigid inner conductors with the mechanical properties of flexible but lossy standard coaxial cables with stranded inner conductors, making it an ideal combination.

The good flexibility of Ecoflex 15 Plus is ensured by a 7-strand hybrid inner conductor with an aluminium core and welded copper jacket. The inner conductor is stranded, compressed, calibrated, and then coated with a pre-coating in highly precise production steps to achieve very good attenuation and matching values. Another advantage is the double shielding: an overlapping copper foil and an overlying copper braid ensure a high shielding effectiveness of > 90 dB at 1 GHz. The black PVC outer jacket of Ecoflex 15 Plus is UV-stabilized.

To simplify installation, solder-free connectors of the N, UHF, and 7-16 DIN standards have been developed, providing optimal contact and can be easily and quickly assembled without special tools.

Ecoflex 15 Plus is a modern coaxial cable for many applications in high-frequency technology: low attenuation, long-term stable, flexible, radiation-resistant, and usable up to the microwave range.

Key features

Diameter	14.6 ± 0.3 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	9.80 dB
f max	8 GHz
Euroclass according to EN 50575	Eca

Characteristics

- Jacket material according to DIN EN 50290-2-22 (VDE 0819), compound type TM 52 (HD 624.2)
- Flame-retardant according to IEC 60332-1-2
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- UV-resistant

Technical Data

Inner conductor	Hybrid CCA – copper-clad aluminium stranded wire
Inner conductor Ø	4.5 mm (7 × 1.5 mm)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	11.3 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	12.1 mm
Jacket	PVC black, UV-stabilized
Weight	167 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	1300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 2.5 Ω/km
DC-resistance outer conductor	5.0 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 15 Plus RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	0.86	2.00	5.00
100 MHz	2.81	7.00	17.00
500 MHz	6.70	17.00	39.00
1000 MHz	9.80	22.50	54.60
3000 MHz	18.30	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.60	1000 MHz	9.80
10 MHz	0.86	1296 MHz	11.40
50 MHz	1.96	1500 MHz	12.40
100 MHz	2.81	1800 MHz	13.80
144 MHz	3.40	2000 MHz	14.60
200 MHz	4.05	2400 MHz	16.20
300 MHz	5.00	3000 MHz	18.30
432 MHz	6.10	4000 MHz	21.60
500 MHz	6.70	5000 MHz	24.60
800 MHz	8.60	6000 MHz	27.50
		8000 MHz	32.70


Max. Power Handling (W at 40 °C)

10 MHz	5.021	2400 MHz	270
100 MHz	1.542	3000 MHz	236
500 MHz	655	4000 MHz	198
1000 MHz	446	5000 MHz	173
2000 MHz	300	6000 MHz	154
		8000 MHz	129

Typ. Attenuation (dB/100 m at 20 °C)

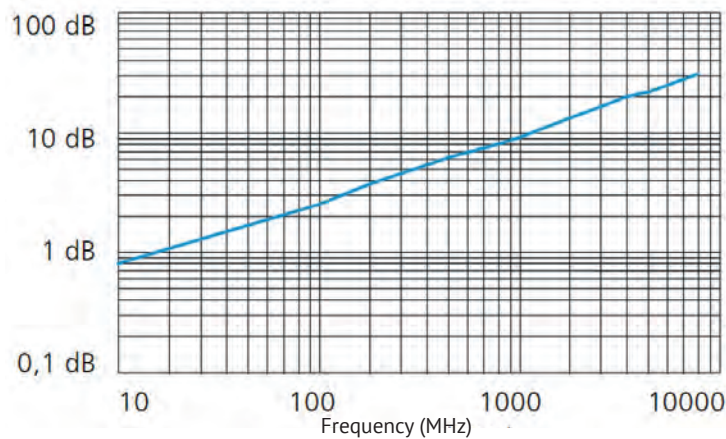

Typ. Return Loss

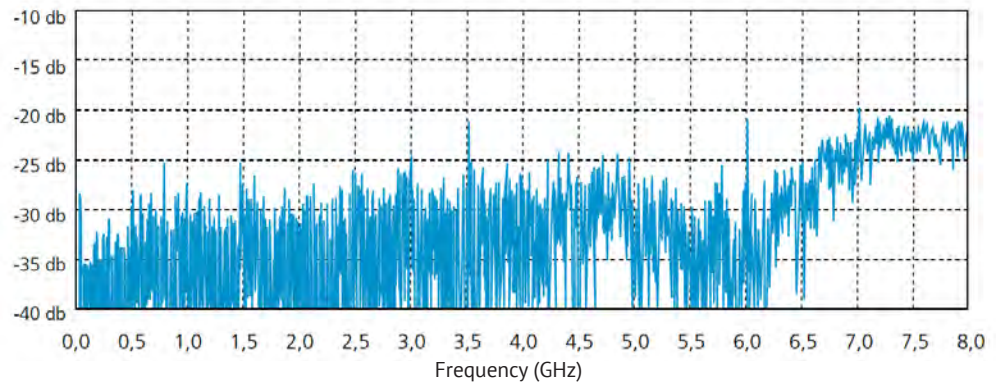

Ecoflex[®] 15 Plus Heatex[®]

flame-retardant, halogen-free,
suitable for installation in buildings
and for railway applications



Ecoflex 15 Plus Heatex is a halogen-free and flame-retardant coaxial cable designed for installation in buildings, facilities, and areas at risk. Ecoflex cables with Heatex jackets are flame-resistant and have low flame propagation. Heatex jackets produce low smoke, ensuring clear escape routes in case of a fire. Being halogen-free, they do not contain reactive elements like fluorine, chlorine, and bromine, preventing the generation of corrosive gases that can lead to significant damage. The UV stability of the durable Heatex jacket also allows for unrestricted exterior use.

Ecoflex 15 Plus Heatex features a 7-strand hybrid inner conductor with an aluminium core and welded copper jacket. The surface characteristics and corresponding RF properties are significantly better than those of conventional copper strands. Another advantage is the double shielding: an overlapping copper foil and an overlying copper braid ensure a high shielding factor of > 90 dB at 1 GHz.

Due to its fire protection class Cca, Ecoflex 15 Plus Heatex is suitable for installation in public buildings. It is certified for railway applications for interior/exterior use according to the requirements sets R15 and R16 of the EN 45545-2 standard.

Key features

Diameter	14.6 ± 0.3 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	9.80 dB
f max	8 GHz
Euroclass according to EN 50575	Cca

Characteristics

- Certified according to EN 45545-2:2013+A1:2015 and EN 45545-2:2020 Requirement Sets R15 + R16 for railway applications
- Flame resistance tested according to EN 60332-1-2:2004 + A1:2015 + A11:2016 and EN 60332-1-3:2004 + A1:2015
- Smoke density tested according to DIN EN 61034-2:2005
- Smoke gas toxicity tested according to EN 50305:2002 Sec. 9.2
- Vertical flame spread tested according to EN 60332-3-24:2009 (Test method C, cable Ø ≥ 12 mm)
- Halogen-free tested according to DIN EN 50306-1:2003
- Halogen acid gas content tested according to DIN EN 60754-1:2015 (HCl < 0.5 %)
- Acidity of the combustion gases tested according to DIN EN 60754-2:2015 (pH value > 4.3)
- Conductivity of the combustion gases tested according to DIN EN 60754-2:2015 (< 10.0 µS/mm)
- Fluorine content tested according to EN 60684-2:2011 Sec. 45.2 Procedure A (< 0.1 %)
- Jacket material according to DIN EN 50290-2-27 (HD 624.7)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- UV-resistant

Technical Data

Inner conductor	Hybrid CCA – copper-clad aluminium stranded wire
Inner conductor Ø	4.5 mm (7 × 1.5 mm)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	11.3 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100%
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75%
Outer conductor Ø	12.1 mm
Jacket	highly flexible thermoplastic copolymer (FRNC) black
Weight	184 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	1300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 2.5 Ω/km
DC-resistance outer conductor	5.0 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

Ecoflex 15 Plus Heatex RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	0.86	2.00	5.00
100 MHz	2.81	7.00	17.00
500 MHz	6.70	17.00	39.00
1000 MHz	9.80	22.50	54.60
3000 MHz	18.30	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.60	1000 MHz	9.80
10 MHz	0.86	1296 MHz	11.40
50 MHz	1.96	1500 MHz	12.40
100 MHz	2.81	1800 MHz	13.80
144 MHz	3.40	2000 MHz	14.60
200 MHz	4.05	2400 MHz	16.20
300 MHz	5.00	3000 MHz	18.30
432 MHz	6.10	4000 MHz	21.60
500 MHz	6.70	5000 MHz	24.60
800 MHz	8.60	6000 MHz	27.50
		8000 MHz	32.70


Max. Power Handling (W at 40 °C)

10 MHz	5.021	2400 MHz	270
100 MHz	1.542	3000 MHz	236
500 MHz	655	4000 MHz	198
1000 MHz	446	5000 MHz	173
2000 MHz	300	6000 MHz	154
		8000 MHz	129

Typ. Attenuation (dB/100 m at 20 °C)

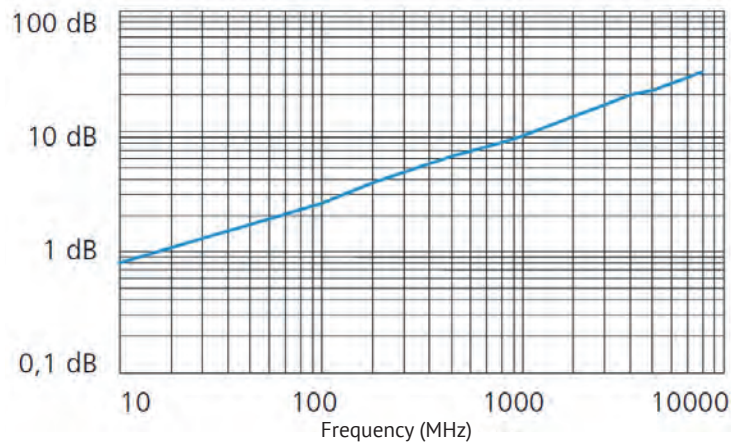

Typ. Return Loss

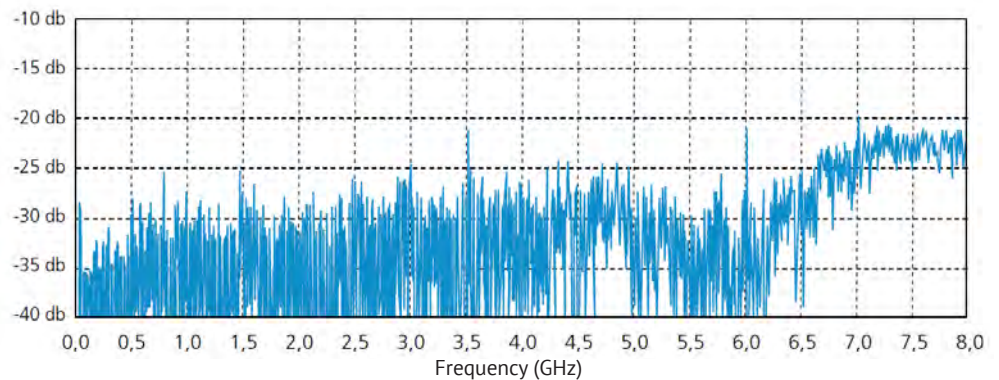

SeaTex[®] 5

thin, low-loss, stray radiation-resistant,
and designed for marine applications



SeaTex 5 is a low-loss, halogen-free, highly flexible communication coaxial cable specially designed for marine and offshore applications. It holds the worldwide SHF shipbuilding approval (DNV certificate) and is suitable for deployment on ships, oil platforms, drilling rigs, and wind turbines. The outer jacket of SeaTex 5 is made of a special thermoplastic copolymer (SHF2), providing the cable with high resistance to heat, cold, oils, saltwater, UV radiation, and weather conditions, ensuring a long lifespan in harsh environments.

Based on the proven Aircell 5, SeaTex 5 features excellent attenuation values, and its flexibility and small bending radius allow for installation in tight spaces. Therefore, SeaTex 5 combines the advantages of Aircell coaxial cables with the requirements of maritime applications. The product is specified up to 10 GHz and can be used in a temperature range of -55 to 85°C.

Key features

Diameter	5.0 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	31.09 dB
f max	10 GHz

Characteristics

- Insulation material according to DIN EN 50290-2-23 (VDE 0819), Tab. 2/A (HD 624.3)
- Jacket material according to IEC 60092-360 (IEC 60092-359) SHF2
- Wall thickness of the cable jacket according to IEC 60092-376
- Flame-retardant according to IEC 60332-3-22 (Cat. A)
- Flame-retardant according to IEC 60332-1-2
- Oil-resistant according to EN 60811-2-1 (24 hrs/100 °C)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- Corrosivity of the combustion gases according to IEC 60754-2
- Smoke density according to IEC 61034
- UV-resistant
- Approved for marine and offshore applications
- DNV certificate no. TAE00001JX



Technical Data

Inner conductor	bare copper wire
Inner conductor Ø	1 × 1.13 mm
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	3.1 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	70 %
Outer conductor Ø	3.7 mm
Jacket	special thermoplastic copolymer (SHF2) black
Weight	36 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	100 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 20.5 Ω/km
DC-resistance outer conductor	17 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	4 kV
Max. voltage	2.5 kV

SeaTex 5 RG 58/U RG 213/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	2.93	5.00	2.00
100 MHz	9.40	17.00	7.00
500 MHz	21.57	39.00	17.00
1000 MHz	31.09	54.60	22.50
3000 MHz	56.39	118.00	58.50


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	2.07	1000 MHz	31.09
10 MHz	2.93	1296 MHz	35.71
50 MHz	6.61	1500 MHz	38.63
100 MHz	9.40	1800 MHz	42.63
144 MHz	11.33	2000 MHz	45.14
200 MHz	13.41	2400 MHz	49.87
300 MHz	16.53	3000 MHz	56.39
432 MHz	19.99	4000 MHz	66.19
500 MHz	21.57	5000 MHz	75.05
800 MHz	27.62	6000 MHz	83.00
		10000 MHz	112.00


Max. Power Handling (W at 40 °C)

10 MHz	1.885	3000 MHz	98
100 MHz	587	4000 MHz	83
500 MHz	256	5000 MHz	74
1000 MHz	178	6000 MHz	66
2000 MHz	122	10000 MHz	49

Typ. Attenuation (dB/100 m at 20 °C)

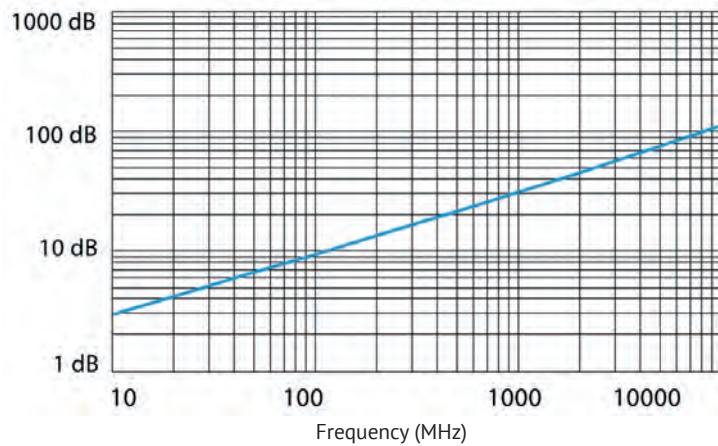

Typ. Return Loss

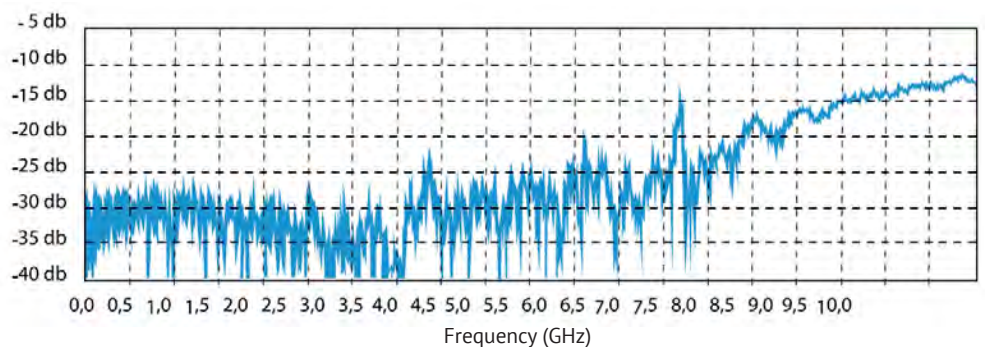

SeaTex[®] 7

ultra-flexible, low-loss, stray radiation-resistant,
and designed for marine applications



SeaTex 7 is a low-loss, halogen-free, highly flexible communication coaxial cable specially designed for marine and offshore applications. It holds the worldwide SHF shipbuilding approval (DNV certificate) and is suitable for deployment on ships, oil platforms, drilling rigs, and wind turbines. The outer jacket of SeaTex 7 is made of a special thermoplastic copolymer (SHF2), providing the cable with high resistance to heat, cold, oils, saltwater, UV radiation, and weather conditions, ensuring a long lifespan in harsh environments.

Based on the proven Aircell 7, SeaTex 7 features excellent attenuation values, and its flexibility and small bending radius allow for installation in tight spaces. Therefore, SeaTex 7 combines the advantages of Aircell coaxial cables with the requirements of maritime applications. The product is specified up to 6 GHz and can be used in a temperature range of -55 to 85°C.

Key features

Diameter	7,3 ± 0,2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	21,52 dB
f max	6 GHz

Characteristics

- Conductor/screen material according to DIN EN 13602 Cu-ETP-R
- Screen material according to DIN EN 13602 Cu-ETP-A
- Insulation material according to ISO 6722-1 Chap. 5.14, Class "A", bending diameter 80 mm
- Jacket material according to IEC 60092-360 (IEC 60092-359) SHF2
- Wall thickness of the cable jacket according to IEC 60092-376
- Flame-retardant according to IEC 60332-3-22 (Cat. A)
- Flame-retardant according to IEC 60332-1-2
- Oil-resistant according to EN 60811-2-1 (24 hrs/100 °C)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- Corrosivity of the combustion gases according to IEC 60754-2
- Smoke density according to IEC 61034
- UV-resistant
- Approved for marine and offshore applications
- DNV certificate no. TAE00001JX



Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	1.9 mm (19 × 0.38 mm, 14 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	5.0 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	85 %
Outer conductor Ø	5.7 mm
Jacket	special thermoplastic copolymer (SHF2) black
Weight	73 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation
Pulling strength	300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 9 Ω/km
DC-resistance outer conductor	8.7 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	10 kV
Max. voltage	8 kV

SeaTex 7 RG 58/U RG 213/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	2.20	5.00	2.00
100 MHz	6.28	17.00	7.00
500 MHz	14.72	39.00	17.00
1000 MHz	21.52	54.60	22.50
3000 MHz	40.88	118.00	58.50


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	1.60	1000 MHz	21.52
10 MHz	2.20	1296 MHz	24.84
50 MHz	4.52	1500 MHz	27.08
100 MHz	6.28	1800 MHz	30.00
144 MHz	7.60	2000 MHz	31.88
200 MHz	9.04	2400 MHz	35.60
300 MHz	11.20	3000 MHz	40.88
432 MHz	13.60	4000 MHz	49.12
500 MHz	14.72	5000 MHz	57.04
800 MHz	19.00	6000 MHz	64.90


Max. Power Handling (W at 40 °C)

10 MHz	2.040	2400 MHz	118
100 MHz	620	3000 MHz	104
500 MHz	260	4000 MHz	89
1000 MHz	191	5000 MHz	78
2000 MHz	131	6000 MHz	70

Typ. Attenuation (dB/100 m at 20 °C)

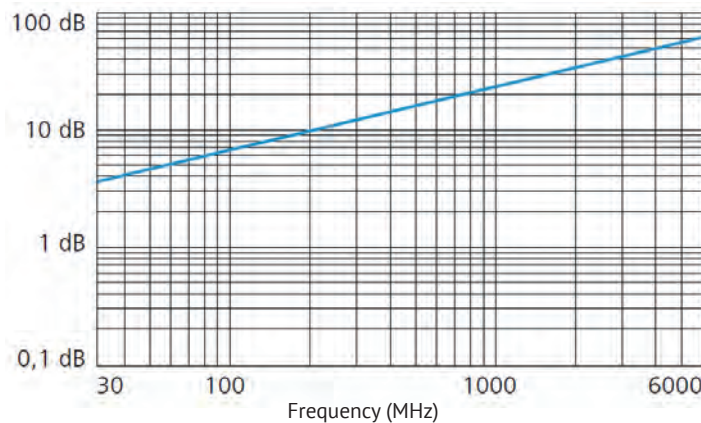

Typ. Return Loss

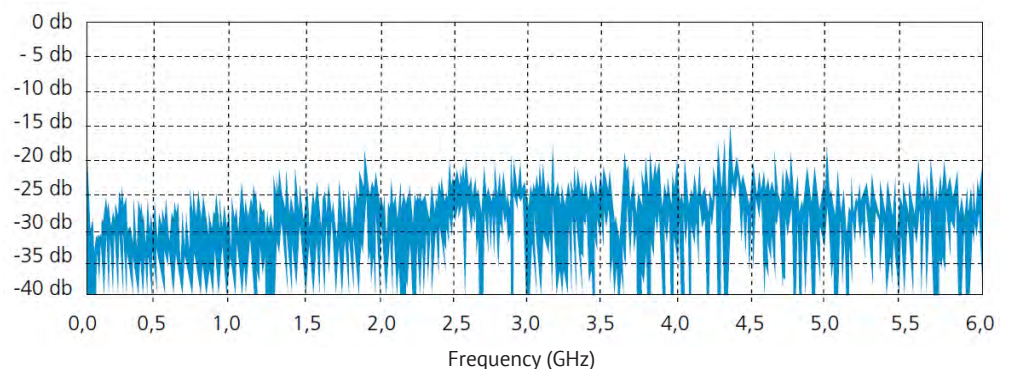

SeaTex[®] 10

ultra-flexible, low-loss,
and designed for marine applications



SeaTex 10 is a low-loss, halogen-free, highly flexible communication coaxial cable specially designed for marine and offshore applications. It holds the worldwide SHF shipbuilding approval (DNV certificate) and is suitable for deployment on ships, oil platforms, drilling rigs, and wind turbines. The outer jacket of SeaTex 10 is made of a special thermoplastic copolymer (SHF2), providing the cable with high resistance to heat, cold, oils, saltwater, UV radiation, and weather conditions, ensuring a long lifespan in harsh environments.

Based on the proven Ecoflex 10, SeaTex 10 features excellent attenuation values, and its flexibility and small bending radius allow for installation in tight spaces. Therefore, SeaTex 10 combines the advantages of Ecoflex coaxial cables with the requirements of maritime applications. The product is specified up to 6 GHz and can be used in a temperature range of -55 to 85°C.

Key features

Diameter	10.2 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	14.20 dB
f max	6 GHz

Characteristics

- Conductor/screen material according to DIN EN 13602 Cu-ETP-R
- Screen material according to DIN EN 13602 Cu-ETP-A
- Insulation material according to ISO 6722-1 Chap. 5.14, Class "A", bending diameter 80 mm
- Jacket material according to IEC 60092-360 (IEC 60092-359) SHF2
- Wall thickness of the cable jacket according to IEC 60092-376
- Flame-retardant according to IEC 60332-3-22 (Cat. A)
- Flame-retardant according to IEC 60332-1-2
- Oil-resistant according to EN 60811-2-1 (24 hrs/100 °C)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- Corrosivity of the combustion gases according to IEC 60754-2
- Smoke density according to IEC 61034
- UV-resistant
- Approved for marine and offshore applications
- DNV certificate no. TAE00001JX



Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	2.85 mm (7 × 1.0 mm, 10 AWG)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	7.2 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	7.9 mm
Jacket	special thermoplastic copolymer (SHF2) black
Weight	135 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	600 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 3.5 Ω/km
DC-resistance outer conductor	6.6 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

SeaTex 10 RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	1.20	2.00	5.00
100 MHz	4.00	7.00	17.00
500 MHz	9.60	17.00	39.00
1000 MHz	14.20	22.50	54.60
3000 MHz	26.70	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.80	1000 MHz	14.20
10 MHz	1.20	1296 MHz	16.50
50 MHz	2.80	1500 MHz	17.90
100 MHz	4.00	1800 MHz	19.90
144 MHz	4.90	2000 MHz	21.20
200 MHz	5.80	2400 MHz	23.60
300 MHz	7.30	3000 MHz	26.70
432 MHz	8.90	4000 MHz	31.10
500 MHz	9.60	5000 MHz	35.20
800 MHz	12.50	6000 MHz	39.00


Max. Power Handling (W at 40 °C)

10 MHz	3.960	2400 MHz	210
100 MHz	1.210	3000 MHz	180
500 MHz	510	4000 MHz	150
1000 MHz	350	5000 MHz	130
2000 MHz	230	6000 MHz	120

Typ. Attenuation (dB/100 m at 20 °C)

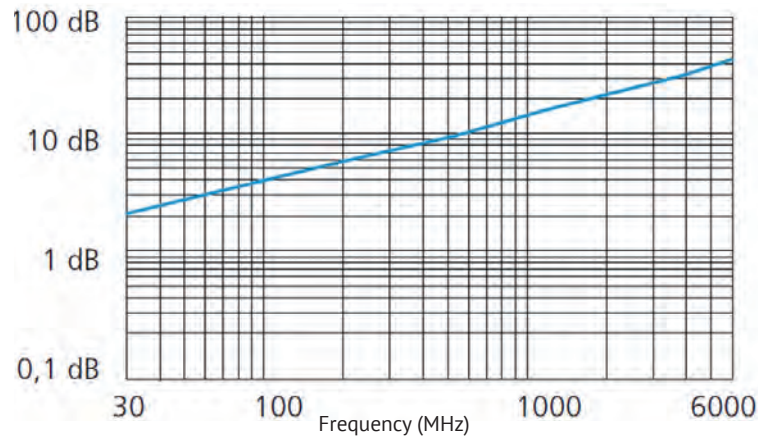

Typ. Return Loss

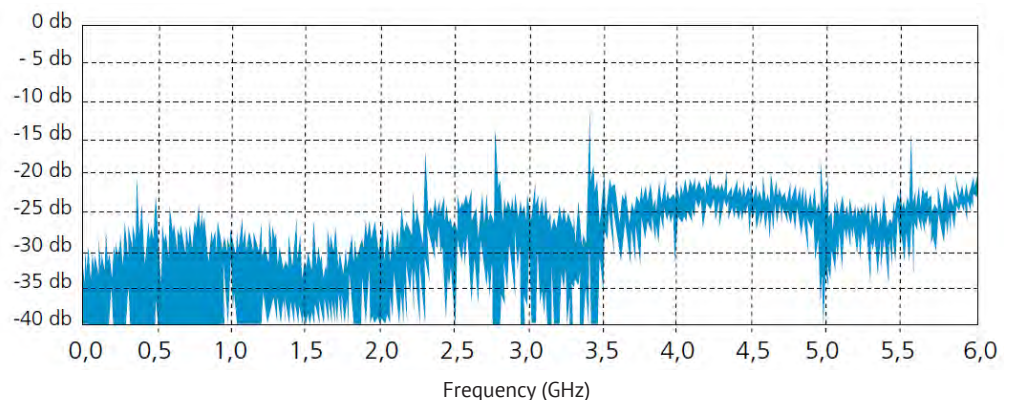

SeaTex[®] 15

flexible, low-loss, stray radiation resistant
and designed for marine applications



SeaTex 15 is a low-loss, halogen-free, highly flexible communication coaxial cable specially designed for marine and offshore applications. It holds the worldwide SHF shipbuilding approval (DNV certificate) and is suitable for deployment on ships, oil platforms, drilling rigs, and wind turbines. The outer jacket of SeaTex 15 is made of a special thermoplastic copolymer (SHF2), providing the cable with high resistance to heat, cold, oils, saltwater, UV radiation, and weather conditions, ensuring a long lifespan in harsh environments.

Based on the proven Ecoflex 15, SeaTex 15 features excellent attenuation values, and its flexibility and small bending radius allow for installation in tight spaces. Therefore, SeaTex 15 combines the advantages of Ecoflex coaxial cables with the requirements of maritime applications. The product is specified up to 6 GHz and can be used in a temperature range of -55 to 85°C.

Key features

Diameter	14.6 ± 0.2 mm
Impedance	50 ± 2 Ω
Attenuation at 1 GHz/100 m	9.80 dB
f max	6 GHz

Characteristics

- Conductor/screen material according to DIN EN 13602 Cu-ETP-R
- Screen material according to DIN EN 13602 Cu-ETP-A
- Insulation material according to ISO 6722-1 Chap. 5.14, Class "A", bending diameter 120 mm
- Jacket material according to IEC 60092-360 (IEC 60092-359) SHF2
- Wall thickness of the cable jacket according to IEC 60092-376
- Flame-retardant according to IEC 60332-3-22 (Cat. A)
- Flame-retardant according to IEC 60332-1-2
- Oil-resistant according to EN 60811-2-1 (24 hrs/100 °C)
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- Fire-resistant, low smoke, halogen-free (LSZH)
- Corrosivity of the combustion gases according to IEC 60754-2
- Smoke density according to IEC 61034
- UV-resistant
- Approved for marine and offshore applications
- DNV certificate no. TAE00001JX



Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	4.5 mm (7 × 1.5 mm)
Dielectric	foamed cellular polyethylene (PE) with skin
Dielectric Ø	11.3 mm
Outer conductor 1	overlapping copper (Cu) foil
Shielding factor	100 %
Outer conductor 2	Copper (Cu) shield braiding of bare copper wires
Shielding factor	75 %
Outer conductor Ø	12.1 mm
Jacket	special thermoplastic copolymer (SHF2) black
Weight	262 kg/km
Min. Bending radius	4 × Ø single, 8 × Ø repeated
Temperature range	-55 to +85 °C transport & fixed installation -40 to +85 °C mobile application
Pulling strength	1300 N

Electrical Data at 20 °C

Capacitance (1 kHz)	78 nF/km
Velocity factor	0.85
Shielding attenuation 1 GHz	≥ 90 dB
DC-resistance inner conductor	≤ 1.5 Ω/km
DC-resistance outer conductor	5.0 Ω/km
Insulation resistance	≥ 10 GΩ*km
Test Voltage DC (wire/screen)	7 kV
Max. voltage	5 kV

SeaTex 15 RG 213/U RG 58/U

Capacitance	78 pF/m	101 pF/m	102 pF/m
Velocity factor	0.85	0.66	0.66
Attenuation (dB/100m)			
10 MHz	0.86	2.00	5.00
100 MHz	2.81	7.00	17.00
500 MHz	6.70	17.00	39.00
1000 MHz	9.80	22.50	54.60
3000 MHz	18.30	58.50	118.00


Typ. Attenuation (dB/100 m at 20 °C)

5 MHz	0.60	1000 MHz	9.80
10 MHz	0.86	1296 MHz	11.40
50 MHz	1.96	1500 MHz	12.40
100 MHz	2.81	1800 MHz	13.80
144 MHz	3.40	2000 MHz	14.60
200 MHz	4.05	2400 MHz	16.20
300 MHz	5.00	3000 MHz	18.30
432 MHz	6.10	4000 MHz	21.60
500 MHz	6.70	5000 MHz	24.60
800 MHz	8.60	6000 MHz	27.50


Max. Power Handling (W at 40 °C)

10 MHz	6.327	2400 MHz	326
100 MHz	1.928	3000 MHz	284
500 MHz	810	4000 MHz	237
1000 MHz	547	5000 MHz	206
2000 MHz	364	6000 MHz	183

Typ. Attenuation (dB/100 m at 20 °C)

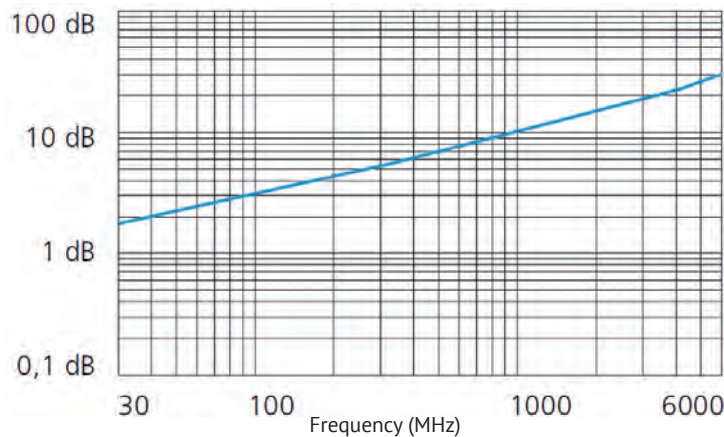

Typ. Return Loss

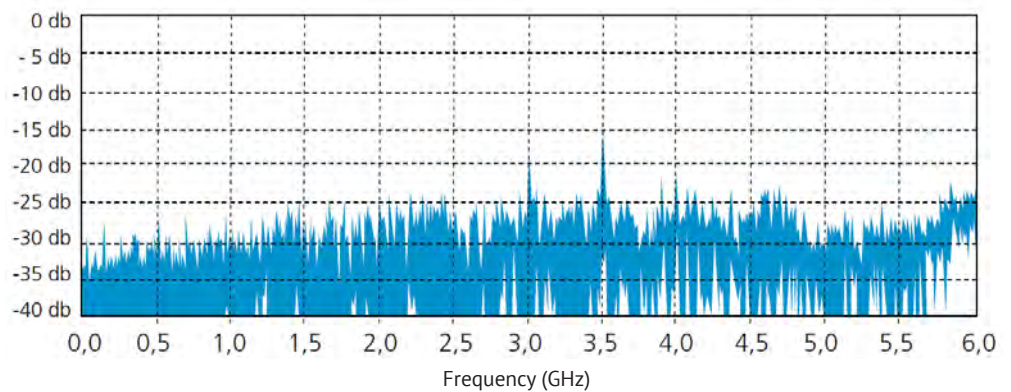

H155 SSB

low-loss and ultra-flexible



H155 by SSB-Electronic is a thin and extremely flexible coaxial cable for the frequency range up to 6 GHz. Due to the low attenuation and the great flexibility, this cable can be used for many applications in communications and radio technology.

The inner conductor of the cable consists of 19 stranded copper wires, each with a diameter of 0.28 mm. This structure of the inner conductor enables the outstanding flexibility of the cable. The extremely low attenuation of H155 is achieved through a low-loss PE dielectric. In order to achieve good shielding attenuation, the outer conductor of the cable has two layers. At first, the aluminium-PET-aluminium foil is used, with a special, particularly tear-resistant and heat-resistant Mylar® polyester as the PET layer. A shield braiding of tinned copper wires with a coverage of 75% is applied to this foil. The cable has a UV-resistant PVC outer jacket.

H155 by SSB-Electronic is suitable for numerous applications in WLAN, GPS, CB and mobile communications, short antenna feed lines, and many other high-frequency applications.

Key features

Diameter	5.4 ± 0.2 mm
Impedance	50 ± 4 Ω
Attenuation at 1 GHz/100 m	29.60 dB
f max	6 GHz
Euroclass according to EN 50575	Fca

Characteristics

- Flame-retardant according to IEC 60332-1-2
- UV-resistant according to IEC 61196-1-212
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- REACH compliant

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	1.42 mm (19 × 0.28 mm)
Dielectric	foamed cellular polyethylene (PE)
Dielectric Ø	3.9 mm
Outer conductor 1	Aluminum-Mylar®Polyester-Aluminum foil
Shielding factor	100 %
Outer conductor 2	shield braiding of tinned copper wires
Shielding factor	75 %
Outer conductor Ø	4.3 mm ± 0.2 mm
Jacket	PVC black, UV-resistant
Weight	41 kg/km
Min. Bending radius	5 × Ø single, 10 × Ø repeated
Temperature range	-20 to +70 °C
Pulling strength	200 N

Electrical Data at 20 °C

Capacitance (1 kHz)	80 nF/km
Velocity factor	0.80
DC-resistance inner conductor	15.4 Ω/km
DC-resistance outer conductor	17.0 Ω/km
Insulation resistance	≥ 5 GΩ*km
Test Voltage DC (wire/screen)	AC 1.0 kV
Max. voltage	2.5 kV

H155 SSB RG 58/U RG 213/U

Capacitance	80 pF/m	102 pF/m	101 pF/m
Velocity factor	0.80	0.66	0.66
Attenuation (dB/100m)			
10 MHz	3.20	5.00	2.00
100 MHz	9.10	17.00	7.00
500 MHz	20.00	39.00	17.00
1000 MHz	29.60	54.60	22.50
3000 MHz	56.30	118.00	58.50


Typ. Attenuation (dB/100 m at 20 °C)

10 MHz	3.20	1296 MHz	33.90
20 MHz	4.40	1500 MHz	36.80
50 MHz	6.90	1750 MHz	40.30
100 MHz	9.10	1800 MHz	40.90
144 MHz	10.55	2000 MHz	43.70
200 MHz	12.40	2400 MHz	49.10
230 MHz	13.40	3000 MHz	56.30
300 MHz	15.30	3600 MHz	62.90
400 MHz	18.00	4000 MHz	67.00
432 MHz	18.70	4800 MHz	75.10
500 MHz	20.00	5000 MHz	77.10
800 MHz	26.10	5400 MHz	80.80
1000 MHz	29.60	6000 MHz	86.50

Max. Power Handling (kW at 20 °C)

50 MHz	0.9	2400 MHz	0.10
230 MHz	0.4	3000 MHz	0.09
400 MHz	0.3	3600 MHz	0.08
800 MHz	0.2	4800 MHz	0.06
1000 MHz	0.17	5400 MHz	0.06
1750 MHz	0.12	6000 MHz	0.05

Typ. Attenuation (dB/100 m at 20 °C)

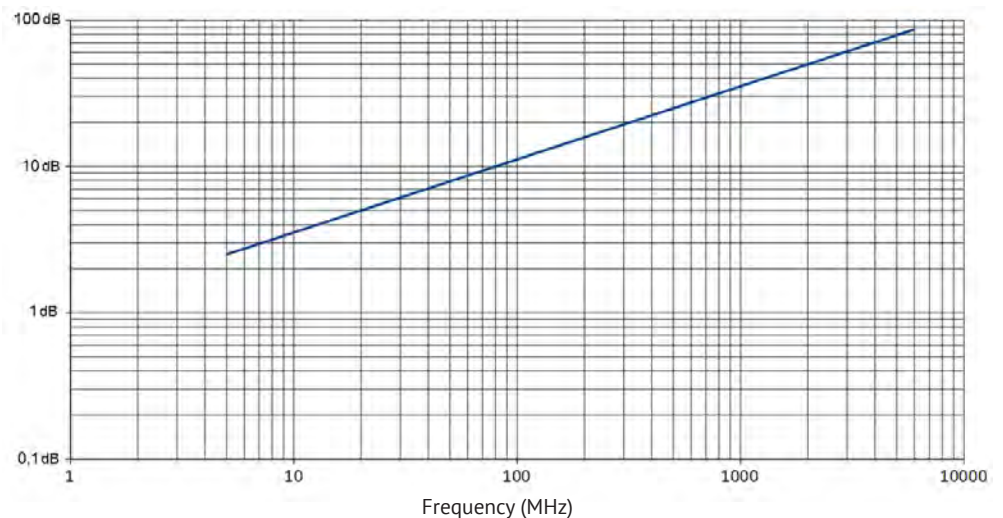

H155 PE SSB

low-loss and ultra-flexible



H155 PE by SSB-Electronic is a thin and extremely flexible coaxial cable for the frequency range up to 6 GHz. Due to the low attenuation and the great flexibility, this cable can be used for many applications in communications and radio technology.

The inner conductor of the cable consists of 19 stranded copper wires, each with a diameter of 0.28 mm. This structure of the inner conductor enables the outstanding flexibility of the cable. The extremely low attenuation of H155 is achieved through a low-loss PE dielectric. In order to achieve good shielding attenuation, the outer conductor of the cable has two layers. At first, the aluminium-PET-aluminium foil is used, with a special, particularly tear-resistant and heat-resistant Mylar® polyester as the PET layer. A shield braiding of tinned copper wires with a coverage of 75% is applied to this foil. The cable has a PE outer jacket.

H155 PE by SSB-Electronic is suitable for numerous applications in WLAN, GPS, CB, and mobile communications, short antenna feed lines, and many other high-frequency applications.

Key features

Diameter	5.4 ± 0.2 mm
Impedance	50 ± 4 Ω
Attenuation at 1 GHz/100 m	29.60 dB
f max	6 GHz
Euroclass according to EN 50575	Fca

Characteristics

- Flame-retardant according to IEC 60332-1-2
- UV-resistant according to IEC 61196-1-212
- RoHS compliant (Directive 2011/65/EC & 2015/863/EU RoHS 3)
- REACH compliant

Technical Data

Inner conductor	stranded (Cu) copper wire
Inner conductor Ø	1.42 mm (19 × 0.28 mm)
Dielectric	foamed cellular polyethylene (PE)
Dielectric Ø	3.9 mm
Outer conductor 1	Aluminum-Mylar®Polyester-Aluminum foil
Shielding factor	100 %
Outer conductor 2	shield braiding of tinned copper wires
Shielding factor	75 %
Outer conductor Ø	4.3 mm ± 0.2 mm
Jacket	Polyethylen (PE)
Weight	41 kg/km
Min. Bending radius	5 × Ø single, 10 × Ø repeated
Temperature range	-40 to +80 °C
Pulling strength	200 N

Electrical Data at 20 °C

Capacitance (1 kHz)	80 nF/km
Velocity factor	0.80
DC-resistance inner conductor	15.4 Ω/km
DC-resistance outer conductor	17.0 Ω/km
Insulation resistance	≥ 5 GΩ*km
Test Voltage DC (wire/screen)	AC 1.0 kV
Max. voltage	2.5 kV

H155 PE SSB RG 58/U RG 213/U

Capacitance	80 pF/m	102 pF/m	101 pF/m
Velocity factor	0.80	0.66	0.66
Attenuation (dB/100m)			
10 MHz	3.20	5.00	2.00
100 MHz	9.10	17.00	7.00
500 MHz	20.00	39.00	17.00
1000 MHz	29.60	54.60	22.50
3000 MHz	56.30	118.00	58.50


Typ. Attenuation (dB/100 m at 20 °C)

10 MHz	3.20	1296 MHz	33.90
20 MHz	4.40	1500 MHz	36.80
50 MHz	6.90	1750 MHz	40.30
100 MHz	9.10	1800 MHz	40.90
144 MHz	10.55	2000 MHz	43.70
200 MHz	12.40	2400 MHz	49.10
230 MHz	13.40	3000 MHz	56.30
300 MHz	15.30	3600 MHz	62.90
400 MHz	18.00	4000 MHz	67.00
432 MHz	18.70	4800 MHz	75.10
500 MHz	20.00	5000 MHz	77.10
800 MHz	26.10	5400 MHz	80.80
1000 MHz	29.60	6000 MHz	86.50

Max. Power Handling (kW at 20 °C)

50 MHz	0.9	2400 MHz	0.10
230 MHz	0.4	3000 MHz	0.09
400 MHz	0.3	3600 MHz	0.08
800 MHz	0.2	4800 MHz	0.06
1000 MHz	0.17	5400 MHz	0.06
1750 MHz	0.12	6000 MHz	0.05

Typ. Attenuation (dB/100 m at 20 °C)

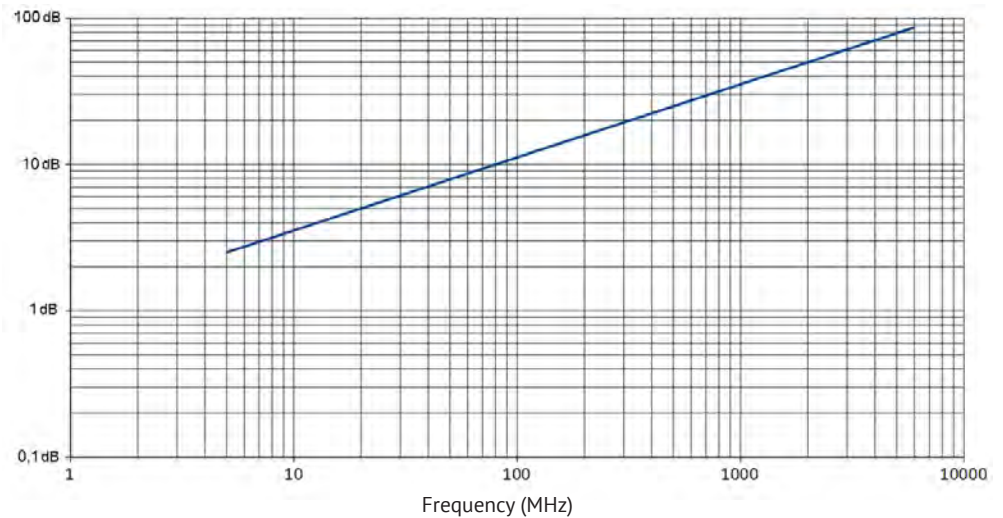

Coaxial Connectors N

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
N male	7700	Aircell 5	solder	screw	PTFE	silicone
N male (crimp)	7701	Aircell 5	solder	crimp	PTFE	silicone
N female (crimp)	7703	Aircell 5	solder	crimp	PTFE	-
N male right-angle	7704	Aircell 5	solder	screw	PTFE	silicone
N male right-angle (crimp)	7705	Aircell 5	solder	crimp	PTFE	silicone
N flange female	7708	Aircell 5	solder	screw	PTFE	silicone
N female	7393	Aircell 7	solder	screw	PTFE	-
N male	7392	Aircell 7	solder	screw	PTFE	silicone
N male (crimp)	7371	Aircell 7	solder	crimp	PTFE	silicone
N male right-angle	7399	Aircell 7	solder	screw	PTFE	silicone
N female	7364	Aircom / Ecoflex 10	solder	screw	PTFE	-
N male	7367	Aircom / Ecoflex 10	solder	screw	PTFE	silicone
N female (crimp)	7370	Ecoflex 10	solder	crimp	PTFE	-
N male (crimp)	7366	Ecoflex 10	solder or crimp	crimp	PTFE	silicone
N female (solderless)	7373	Ecoflex 10	solderless	screw	PTFE	-
N male (solderless)	7383	Ecoflex 10	solderless	screw	PTFE	silicone
N male Slotted	7401	Ecoflex 10	solder	screw	PTFE	silicone
N male right-angle	7360	Aircom / Ecoflex 10	solder	screw	PTFE	silicone
N male right-angle	7360 HTX	Aircom / Ecoflex 10 FRNC / SeaTex	solder	screw	PTFE	silicone
N female	7361	Ecoflex 10 FRNC / SeaTex	solderless	screw	PTFE	-
N male	7368	Ecoflex 10 FRNC / SeaTex	solder	screw	PTFE	-
N male (solderless)	7369	Ecoflex 10 Plus Heatex/SeaTex	solderless	screw	PTFE	silicone
N male (solderless)	7351	Ecoflex 15 FRNC / SeaTex	solderless	screw	PTFE	silicone
N female (solderless)	7352	Ecoflex 15 FRNC / SeaTex	solderless	screw	PTFE	silicone
N male (solderless)	7395	Ecoflex 15 / Plus	clamp	screw	PTFE	silicone

	Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
	nickel-plated brass	gold-plated	33 g	<1.1	50 Ω	6 GHz	≤ -32.9dB @ 1GHz; ≤ -26.5dB @ 3GHz; ≤ -21.4dB @ 11GHz	≤ 0.01 dB
	nickel-plated brass	gold-plated	33 g	<1.1	50 Ω	6 GHz	≤ -33.8dB @ 1GHz; ≤ -28.7dB @ 3GHz; ≤ -22.0dB @ 11GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	23 g	<1.1	50 Ω	6 GHz	≤ -33.8dB @ 1GHz; ≤ -28.7dB @ 3GHz; ≤ -22.0dB @ 11GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	35 g	<1.1	50 Ω	6 GHz	≤ -33.8dB @ 1GHz; ≤ -28.7dB @ 3GHz; ≤ -22.0dB @ 11GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	36 g	<1.1	50 Ω	6 GHz	≤ -44.0dB @ 1GHz; ≤ -29.5dB @ 3GHz; ≤ -28.0dB @ 11GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	51 g	<1.1	50 Ω	6 GHz	≤ -37.7dB @ 1GHz; ≤ -30.0dB @ 3GHz; ≤ -29.9dB @ 11GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	50 g	<1.1	50 Ω	6 GHz	≤ -20dB @ 10GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	59 g	<1.05	50 Ω	10 GHz	≤ -27.5dB @ 11GHz; ≤ -36.1dB @ 3GHz; ≤ -39.6dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	31 g	<1.05	50 Ω	4 GHz	≤ -27.5dB @ 11GHz; ≤ -36.1dB @ 3GHz; ≤ -39.6dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	83 g	<1.05	50 Ω	4 GHz	≤ -20dB @ 10GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	60 g	<1.05	50 Ω	3.5 GHz	≤ -33.2dB @ 11GHz; ≤ -36.4dB @ 3GHz; ≤ -47.5dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	55 g	<1.06	50 Ω	10 GHz	≤ -30.0dB @ 11GHz; ≤ -31.6dB @ 3GHz; ≤ -39.9dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	31 g	<1.05	50 Ω	4 GHz	≤ -51.4dB @ 1GHz; ≤ -37.2dB @ 4GHz; ≤ -30.9dB @ 11GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	31 g	<1.05	50 Ω	4 GHz	≤ -32.4dB @ 11GHz; ≤ -35.6dB @ 3GHz; ≤ -42.5dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	60 g	<1.05	50 Ω	1 GHz	≤ -33.2dB @ 11GHz; ≤ -36.4dB @ 3GHz; ≤ -47.5dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	55 g	<1.05	50 Ω	10 GHz	≤ -32.4dB @ 11GHz; ≤ -35.6dB @ 3GHz; ≤ -42.5dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	55 g	<1.05	50 Ω	10 GHz	≤ -30.0dB @ 11GHz; ≤ -31.6dB @ 3GHz; ≤ -39.9dB @ 1GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	90 g	<1.06	50 Ω	4 GHz	≤ -29.1dB @ 11GHz; ≤ -31.5dB @ 3GHz; ≤ -35.4dB @ 1GHz	≤ 0.05 dB
	brass with CuSnZn3 surface	gold-plated	90 g	<1.06	50 Ω	4 GHz	≤ -29.1dB @ 11GHz; ≤ -31.5dB @ 3GHz; ≤ -35.4dB @ 1GHz	≤ 0.05 dB
	brass with CuSnZn3 surface	gold-plated	60 g	<1.05	50 Ω	3 GHz	≤ -38.6dB @ 1GHz; ≤ -33.7dB @ 3GHz; ≤ -38.7dB @ 11GHz	≤ 0.05 dB
	brass with CuSnZn3 surface	gold-plated	69 g	<1.06	50 Ω	10 GHz	≤ -41.2dB @ 1GHz; ≤ -32.0dB @ 3GHz; ≤ -31.2dB @ 11GHz	≤ 0.05 dB
	brass with CuSnZn3 surface	gold-plated	55 g	<1.06	50 Ω	10 GHz	≤ -41.2dB @ 1GHz; ≤ -32.0dB @ 3GHz; ≤ -31.2dB @ 11GHz	≤ 0.05 dB
	brass with CuSnZn3 surface	gold-plated	88 g	<1.06	50 Ω	11 GHz	≤ -29.1dB @ 11GHz; ≤ -31.5dB @ 3GHz; ≤ -35.4dB @ 1GHz	≤ 0.05 dB
	brass with CuSnZn3 surface	gold-plated	74 g	<1.06	50 Ω	11 GHz	≤ -33.6dB @ 1GHz; ≤ -32.5dB @ 4GHz; ≤ -29.3dB @ 11GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	78 g	<1.06	50 Ω	11 GHz	≤ -29.1dB @ 11GHz; ≤ -31.5dB @ 3GHz; ≤ -35.4dB @ 1GHz	≤ 0.05 dB

Coaxial Connectors BNC

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
BNC female	7722	Aircell 5	solder	screw	PTFE	-
BNC male	7720	Aircell 5	solder	screw	PTFE	silicone
BNC female (crimp)	7723	Aircell 5	solder	crimp	PTFE	-
BNC male (crimp)	7721	Aircell 5	solder	crimp	PTFE	silicone
BNC mounting female (crimp)	7727	Aircell 5	solder	crimp	PTFE	-
BNC female	7389	Aircell 7	solder	screw	PTFE	-
BNC male	7391	Aircell 7	solder	screw	PTFE	-
BNC male (crimp)	7375	Aircell 7	crimp	crimp	PTFE	silicone
BNC female	7386	Aircom / Ecoflex 10	solder	screw	PTFE	-
BNC male	7379	Aircom / Ecoflex 10	solder	screw	PTFE	-

Coaxial Connectors TNC

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
TNC female	7742	Aircell 5	solder	screw	PTFE	silicone
TNC male	7740	Aircell 5	solder	screw	PTFE	silicone
TNC female (crimp)	7743	Aircell 5	solder	crimp	PTFE	-
TNC male (crimp)	7741	Aircell 5	solder	crimp	PTFE	-
TNC male right-angle (crimp)	7745	Aircell 5	solder	crimp	PTFE	-
TNC-RP male (crimp)	7746	Aircell 5	solder	crimp	PTFE	-
TNC male	7396	Aircell 7	solder	screw	PTFE	-
TNC male (crimp)	7374	Aircell 7	crimp	crimp	POM	-
TNC male	7382	Aircom / Ecoflex 10	solder	screw	PTFE	-
TNC-RP male	7384	Aircom / Ecoflex 10	solder	screw	PTFE	-

Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
nickel-plated brass	gold-plated	19 g	<1.1	50 Ω	3 GHz	≤ -46.4dB @ 0.5GHz; ≤ -42.9dB @ 1GHz; ≤ -26.5dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	18 g	<1.21	50 Ω	4 GHz	≤ -45.1dB @ 0.5GHz; ≤ -32.3dB @ 1GHz; ≤ -20.8dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	10 g	<1.09	50 Ω	4 GHz	≤ -35.9dB @ 0.5GHz; ≤ -35.2dB @ 1GHz; ≤ -27.8dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	8 g	<1.21	50 Ω	4 GHz	≤ -45.1dB @ 0.5GHz; ≤ -32.3dB @ 1GHz; ≤ -20.8dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	17 g	<1.1	50 Ω	4 GHz	≤ -35.8dB @ 0.5GHz; ≤ -31.0dB @ 1GHz; ≤ -27.3dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	37 g	<1.04	50 Ω	3 GHz	≤ -35.8dB @ 11GHz; ≤ -36.2dB @ 3GHz; ≤ -38.9dB @ 1GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	39 g	<1.04	50 Ω	3 GHz	≤ -35.8dB @ 11GHz; ≤ -36.2dB @ 3GHz; ≤ -38.9dB @ 1GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	11 g	<1.23	50 Ω	4 GHz	≤ -20dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	56 g	<1.23	50 Ω	3 GHz	≤ -20dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	54 g	<1.02	50 Ω	2.5 GHz	≤ -39.3dB @ 11GHz; ≤ -43.6dB @ 3GHz; ≤ -49.0dB @ 1GHz	≤ 0.05 dB

Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
nickel-plated brass	gold-plated	13 g	<1.06	50 Ω	6 GHz	≤ -35.8dB @ 1GHz; ≤ -31.6dB @ 3GHz; ≤ -31.7dB @ 11GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	20 g	<1.15	50 Ω	6 GHz	≤ -27.6dB @ 1GHz; ≤ -23.2dB @ 3GHz; ≤ -27.4dB @ 11GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	13 g	<1.12	50 Ω	6 GHz	≤ -30.1dB @ 1GHz; ≤ -25.4dB @ 3GHz; ≤ -29.4dB @ 11GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	13 g	<1.1	50 Ω	6 GHz	≤ -31.4dB @ 1GHz; ≤ -27.3dB @ 3GHz; ≤ -29.9dB @ 11GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	21 g	<1.09	50 Ω	4 GHz	≤ -32.4dB @ 1GHz; ≤ -28.1dB @ 3GHz; ≤ -23.0dB @ 11GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	13 g	<1.04	50 Ω	6 GHz	≤ -23.5dB @ 1GHz; ≤ -36.6dB @ 3GHz; ≤ -29.4dB @ 11GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	44 g	<1.12	50 Ω	3 GHz	≤ -25dB @ 3GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	16 g	<1.12	50 Ω	4 GHz	≤ -25dB @ 3GHz	≤ 0.05 dB
brass with CuSnZn3 surface	gold-plated	50 g	<1.05	50 Ω	3 GHz	≤ -29.4dB @ 11GHz; ≤ -33.3dB @ 3GHz; ≤ -40.5dB @ 1GHz	≤ 0.05 dB
brass with CuSnZn3 surface	gold-plated	60 g	<1.12	50 Ω	3 GHz	≤ -25dB @ 3GHz	≤ 0.05 dB

Coaxial Connectors SMA

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
SMA female (crimp)	7751	Aircell 5	crimp	crimp	PTFE	-
SMA male (crimp)	7750	Aircell 5	solder	crimp	PTFE	silicone
SMA-RP female (crimp)	7756	Aircell 5	solder	crimp	PTFE	-
SMA-RP male (crimp)	7755		solder	crimp	PTFE	silicone
SMA male right-angle (crimp)	7752	Aircell 5	solder	crimp	PTFE	silicone
SMA male	7385	Aircell 7	solder	screw	PTFE	silicone
SMA male (crimp)	7387	Aircell 7	crimp	crimp	PTFE	-
SMA male	7362	Aircom / Ecoflex 10	solder	solder	PTFE	silicone
SMA male RP	7365	Aircom / Ecoflex 10	solder	screw	PTFE	silicone
SMA male RP	7381	Aircell 7	solder	screw	PTFE	silicone

Coaxial Connectors UHF

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
UHF male	7760	Aircell 5	solder	screw	PTFE	-
UHF male (crimp)	7762	Aircell 5	solder	crimp	PTFE	-
UHF male (standard)	7390	Aircell 7	solder	screw	PTFE	-
UHF male PRO	7394	Aircell 7	solder	screw	PTFE	-
UHF male	7377	Ecoflex 10 // Aircom	solder	screw	PTFE	-
UHF male PRO	7378	Aircom / Ecoflex 10	solder	screw	PTFE	-
UHF male (solderless)	7350	Ecoflex 15 / Plus	clamp	screw	PTFE	-
UHF Flange female	7340	-	-	-	PTFE	-

Coaxial Connectors 7-16 DIN

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
7-16 DIN male	7380	Aircom / Ecoflex 10	solder	screw	PTFE	-
7-16 DIN female	7388	Aircom / Ecoflex 10	solder	screw	PTFE	-
7-16 DIN female (solderless)	7349	Ecoflex 15 / Plus	clamp	screw	PTFE	-
7-16 DIN male (solderless)	7398	Ecoflex 15 / Plus	clamp	screw	PTFE	silicone

Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
nickel-plated brass	gold-plated	5 g	<1.1	50 Ω	8 GHz	≤ -32.6dB @ 1GHz; ≤ -25.4dB @ 4GHz; ≤ -23.9dB @ 12.4GHz	≤ 0.05 dB
brass gold-plated	gold-plated	10 g	<1.1	50 Ω	8 GHz	≤ -32.6dB @ 1GHz; ≤ -25.4dB @ 4GHz; ≤ -23.9dB @ 12.4GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	10 g	<1.05	50 Ω	8 GHz	≤ -40.7dB @ 1GHz; ≤ -33.7dB @ 4GHz; ≤ -29.1dB @ 12.4GHz	≤ 0.05 dB
brass gold-plated	gold-plated	7 g	<1.05	50 Ω	8 GHz	≤ -44.8dB @ 1GHz; ≤ -30.0dB @ 4GHz; ≤ -30.7dB @ 12.4GHz	≤ 0.05 dB
brass gold-plated	gold-plated	10 g	<1.12	50 Ω	8 GHz	≤ -32.6dB @ 1GHz; ≤ -25.4dB @ 4GHz; ≤ -23.9dB @ 12.4GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	25 g	<1.12	50 Ω	6 GHz	≤ -25dB @ 4GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	7 g	<1.12	50 Ω	6 GHz	≤ -25dB @ 4GHz	≤ 0.05 dB
brass with CuSnZn3 surface	gold-plated	34 g	<1.12	50 Ω	11 GHz	≤ -25dB @ 4GHz	≤ 0.05 dB
brass with CuSnZn3 surface	gold-plated	34 g	<1.03	50 Ω	11 GHz	≤ -43.4dB @ 1GHz; ≤ -38.2dB @ 4GHz; ≤ -26.5dB @ 12.4GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	25 g	<1.03	50 Ω	6 GHz	≤ -43.4dB @ 1GHz; ≤ -38.2dB @ 4GHz; ≤ -26.5dB @ 12.4GHz	≤ 0.05 dB

Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
nickel-plated brass	gold-plated	17 g	<1.04	50 Ω	1 GHz	≤ -36.4dB @ 0.2GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	19 g	<1.06	50 Ω	1 GHz	≤ -31.5dB @ 0.2GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	44 g	<1.07	50 Ω	1 GHz	≤ -30.9dB @ 200MHz	≤ 0.05 dB
nickel-plated brass	gold-plated	44 g	<1.07	50 Ω	1 GHz	≤ -30.9dB @ 200MHz	≤ 0.05 dB
nickel-plated brass	gold-plated	23 g	<1.12	50 Ω	200 MHz	≤ -25dB @ 200MHz	≤ 0.05 dB
nickel-plated brass	gold-plated	44 g	<1.06	50 Ω	200 MHz	≤ -23.6dB @ 1GHz; ≤ -30.4dB @ 500MHz; ≤ -32.4dB @ 200MHz	≤ 0.05 dB
nickel-plated brass	gold-plated	78 g	<1.12	50 Ω	200 MHz	≤ -25dB @ 1GHz	≤ 0.05 dB
nickel-plated brass	gold-plated	22 g	<1.12	50 Ω	200 MHz	≤ -25dB @ 1GHz	≤ 0.05 dB

Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
nickel-plated brass	silver-plated	106 g	<1.06	50 Ω	6 GHz	≤ -40.7dB @ 1GHz; ≤ -30.7dB @ 3GHz; ≤ -32.8dB @ 7.5GHz	≤ 0.05 dB
nickel-plated brass	silver-plated	106 g	<1.04	50 Ω	6 GHz	≤ -45.9dB @ 1GHz; ≤ -36.3dB @ 3GHz; ≤ -28.3dB @ 7.5GHz	≤ 0.05 dB
nickel-plated brass	silver-plated	110 g	<1.04	50 Ω	6 GHz	≤ -45.8dB @ 1GHz; ≤ -36.2dB @ 3GHz; ≤ -28.1dB @ 7.5GHz	≤ 0.05 dB
nickel-plated brass	silver-plated	146 g	<1.04	50 Ω	6 GHz	≤ -45.9dB @ 1GHz; ≤ -36.3dB @ 3GHz; ≤ -28.3dB @ 7.5GHz	≤ 0.05 dB

Coaxial Connectors FME

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
FME female (crimp)	7808	Aircell 5	solder	crimp	Delrin	-
FME male (crimp)	7807	Aircell 5	solder	crimp	PTFE	-
FME female (crimp)	7806	Aircell 7	solder	crimp	Delrin	-
FME male (crimp)	7805	Aircell 7	solder	crimp	PTFE	-

Coaxial Connectors 4.3-10

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
SSB Snap-In 4.3-10 Straight Crimp	7500	Aircom Premium Aircell 5	crimp	crimp	PTFE	silicone
SSB Snap-In 4.3-10 Straight Clamp	7501	Aircom Premium Aircell 5	clamp	clamp	PTFE	silicone
SSB Snap-In 4.3-10 Angle Crimp	7502	Aircom Premium Aircell 5	solder	crimp	PTFE	silicone
SSB Snap-In 4.3-10 Flange Cassis female	7503	Aircom Premium Aircell 5	solder	-	PTFE	-

Coaxial Connectors NEX 10

Connector	Item No.	Suitable for	Inner conductor	Outer conductor	Material Isolator	Material gasket in mating face
Nex10 male – Ecoflex 10 / Aircom Premium	7810	Aircom Premium Ecoflex 10	solder	crimp	PTFE	silicone
Nex10 female – Ecoflex 10 / Aircom Premium	7811	Aircom Premium Aircell 5	solder	crimp	PTFE	-

	Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
	nickel-plated brass	gold-plated	10 g	<1.12	50 Ω	4 GHz	≤ -25dB @ 2GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	10 g	<1.1	50 Ω	4 GHz	≤ -32.9dB @ 1GHz; ≤ -26.5dB @ 3GHz; ≤ -21.4dB @ 11GHz	≤ 0.01 dB
	nickel-plated brass	gold-plated	12 g	<1.12	50 Ω	2 GHz	≤ -33.9dB @ 0.5GHz; ≤ -29.8dB @ 1GHz; ≤ -25.1dB @ 2GHz	≤ 0.05 dB
	nickel-plated brass	gold-plated	12 g	<1.04	50 Ω	2 GHz	≤ -32.9dB @ 0.5GHz; ≤ -30.7dB @ 1GHz; ≤ -36.1dB @ 2GHz	≤ 0.05 dB

	Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	SWR @ 3 GHz	Impedance	Frequency up to	Return Loss	Insertion Loss
	brass with CuSnZn3 surface	Cu2Ag5	33 g	<1.04	50 Ω	6 GHz	1GHz - 40dB; 2.5GHz - 35dB	≤ 0.05 dB
	brass with CuSnZn3 surface	Cu2Ag5	61 g	<1.07	50 Ω	6 GHz	1GHz - 35dB; 2GHz - 32dB; 6GHz - 28dB	≤ 0.05 dB
	brass with CuSnZn3 surface	Cu2Ag5	49 g	<1.07	50 Ω	6 GHz	1GHz - 34dB; 2GHz - 28dB; 6GHz - 17dB	≤ 0.05 dB
	brass with CuSnZn3 surface	Cu2Ag5	25 g	<1.07	50 Ω	6 GHz	1 GHz - 38 dB 2.5 GHz - 32 dB	≤ 0.05 dB

	Surface of Body & Other Metal Parts, Except Pin	Pin Surface	Weight	VSWR	Impedance	Frequency up to	Return Loss	Insertion Loss
	brass with HEP2R surface	silver-plated	26 g	≤ 1.15 @ DC-6 GHz; ≤ 1.35 @ 6-12 GHz	50 Ω	12 GHz	< -36 dB @ DC-4 GHz; < -34 dB @ 4-6 GHz; < -30 dB @ 6-12 GHz*	≤ 0.05 dB
	brass with HEP2R surface	silver-plated	24 g	≤ 1.15 @ DC-6 GHz; ≤ 1.35 @ 6-12 GHz	50 Ω	12 GHz	< -36 dB @ DC-4 GHz; < -34 dB @ 4-6 GHz; < -30 dB @ 6-12 GHz	≤ 0.05 dB

Coaxial Adapters

Adapter	SMA male	SMA female	SMA RP male	UHF female	UHF male	BNC female	BNC male	BNC female female
BNC female	8733							
BNC female						8738		
BNC male		8732						
BNC male				8730				
BNC male							8739	
BNC male								8737
BNC male								
BNC male								
N female								
N female			8762					
N female								
N female								
N female							8701	
N female								
N female								
N female	8705							
N female								
N female					8703			
N right-angle female								
N male							8700	
N male								
N male								
N male		8704						
N male								
N male				8702				
FME male								
FME male		8745						
FME male	8742							
SMA female		8760						
UHF male					8782			
7-16 DIN female								

Handling Instructions

for coaxial cables



Our coaxial cables are very durable and designed for continuous use. As consumables, they are intended for one-time installation. Whether installed in buildings, on ships and oil platforms in rough seas, or for mobile use – the applications of our coaxial cables are diverse. Proper handling of coaxial cables is crucial for their durability in every application.

Please refer to the data sheet of each cable for specific technical details such as temperature range, bending radius, etc. Coaxial cables damaged due to improper use are excluded from claims. All information is provided without guarantee and subject to change.

To ensure smooth operation and maximize the lifespan of our coaxial cables, we recommend following the guidelines for cable handling provided.

- **Avoid strong mechanical stress on the coaxial cable, such as severe bending, stepping on, sharp edges, unnecessary cuts, etc.**
- **Do not expose your coaxial cables to high temperatures (>85 °C).**
- **Avoid direct contact of the coaxial cable with corrosive liquids.**
- **If possible, avoid constant and severe bending of the cable. Over time, this can cause damage to the outer conductor. Our coaxial cables are not suitable for drag chains and rotors.**
- **Pay attention to the tensile stress on your coaxial cable. If cables are installed vertically over longer distances, they must be secured at certain intervals to minimize tensile load.**



Contact

Do you have questions about our products
or a specific application?

Then give us a call or send us an email.

We will get back to you as soon as possible.

We appreciate feedback, questions, and your suggestions.



Am Pulverhäuschen 4
D-59557 Lippstadt



+49 (0) 2941-93385-0



sales@ssb-electronic.com



www.ssb-electronic.com



SSB-Electronic GmbH

Am Pulverhäuschen 4
59557 Lippstadt
Germany

Tel.: +49 2941-93385-0
Fax: +49 2941-93385-120

sales@ssb-electronic.com
www.ssb-electronic.com